



TXGB-AZ-300 Product Data Sheet

GPS Beidou Positioning Antenna
SMA Male Connector

I. Product Introduction



TXGB-AZ-300 is a GPS beidou positioning antenna. Dimension of the antenna is 50*38*16.7mm. With a SMA male connector (SMA inner screw thread and inner needle), it can be applied to wireless equipment with frequency of GPS in Automobile Sales Service shop, bus station announcements, taxi companies and individuals, DVD navigation, car maintenance and so on.

II. Specification and Parameters

| Physical Parameters | |
|--------------------------------------|---|
| Frequency | 1575.042 ± 1.023MHz |
| | 1561.098 ± 2.046MHz |
| Bandwidth | GPS-L1 > 10MHz |
| | BD-B1 > 10MHz |
| SWR | ≤ 1.5 |
| Polarization | RHCP |
| Radiation Direction | Directional |
| Input Impedance | 50 Ω |
| Power Capacity | 20W |
| LNA Characters (Low Noise Amplifier) | |
| Gain | 28 ± 2dB |
| Noise Factor | < 1.5dB |
| Passband Ripple | ± 1.0dB |
| Rejection | F0 ± 100MHz: 35dBc min |
| Direct Voltage | 3-5V |
| Direct Current | ≤ 15mA(DC3.3V) |
| Output VSWR | 2.0 MAX |
| Other Parameters | |
| Dimension | 50*38*16.7mm |
| Total Weight | 61g |
| Coat Color | Black |
| Feeder Length | 3m |
| Feeder Material | RG174 |
| Connector | SMA Male (SMA inner screw thread and inner needle) |
| Working Temperature | -40°C ~ +85°C |
| Storage Temperature | -40°C ~ +85°C |



III. Testing

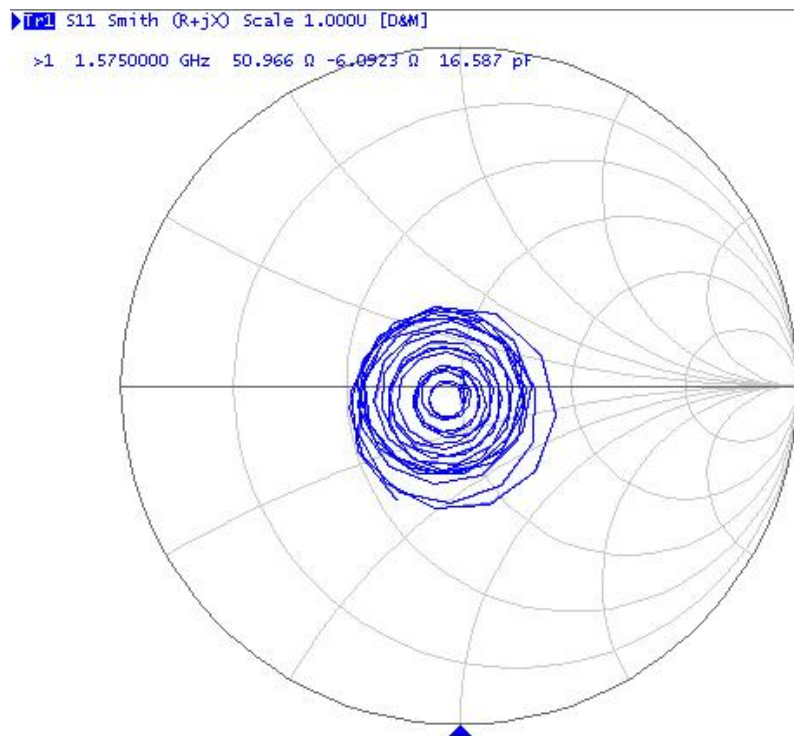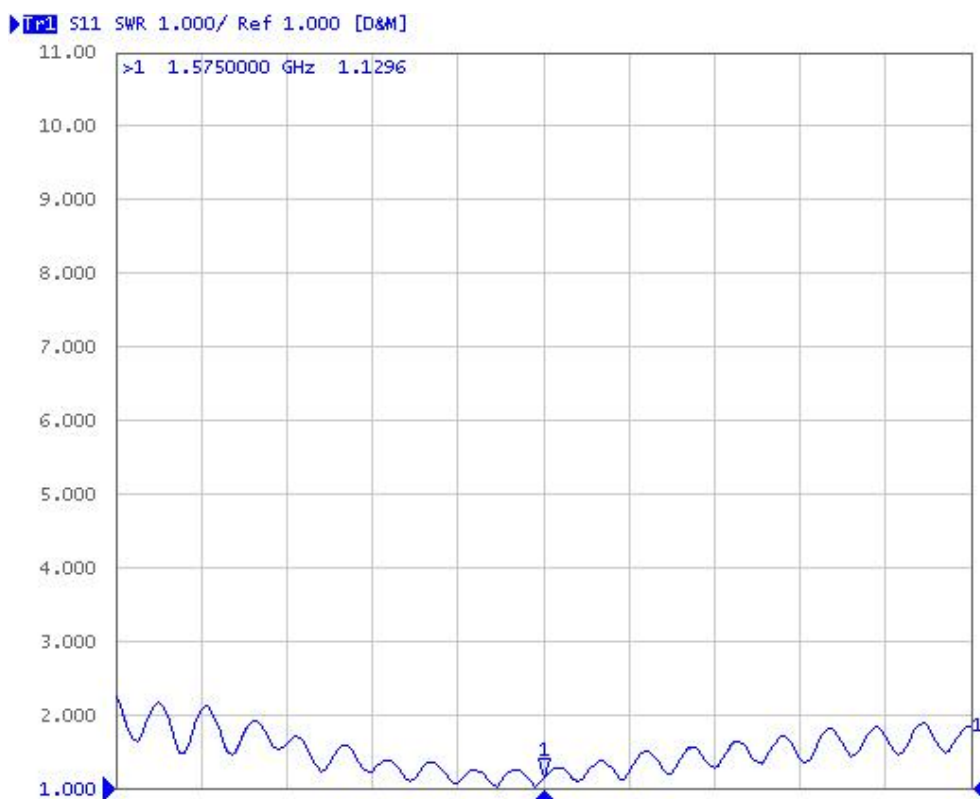

IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.ebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

Fax: 028-64146160 ext. 821

Web: www.ebyte.com

Address: Innovation Center D347, 4# XI-XIN Road, Chengdu, Sichuan, China

