




## DC BRUSHLESS FAN

AF7D6020B 60\*60\*20mm


Motor:DC Brushless  
 Bearing:Ball、sleeve、Hydraulic  
 Shell frame: PBT UL94V-0  
 Fan blade: PBT UL94V-0  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE----(-)  
 PIN2:RED WIRE----(+)



**DIMENSIONS DRAWING(unit:mm)**

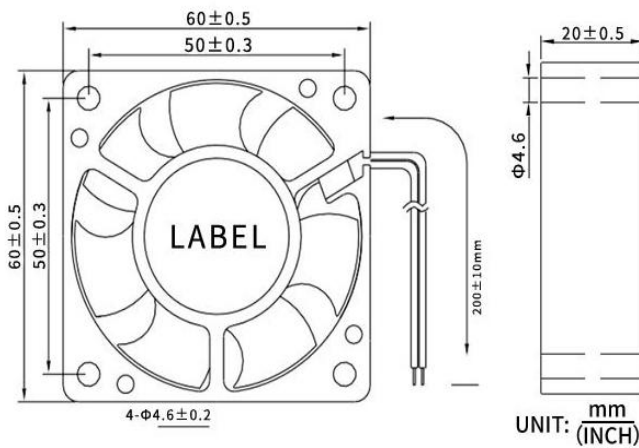

**P@Q CURVE(AT RATED VOLTAGE)**

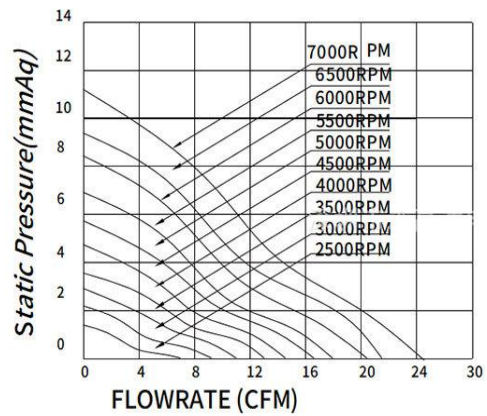

Model	Bearing Mode①	Rate d Volt	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Walt	R. P. M					dB-A
AF7D6020B12L	B=Ball S=Sleeve H=Hydraulic	12	7~13.5	0.06	0.72	3500	0.330	11.70	2.86	0.113	29.9
AF7D6020B12LM		12	7~13.5	0.08	0.96	4000	0.382	13.40	3.70	0.146	33.1
AF7D6020B12M		12	7~13.5	0.1	1.20	4500	0.429	15.10	4.71	0.185	36.5
AF7D6020B12H		12	7~13.5	0.12	1.44	5000	0.482	17.00	5.78	0.228	38.5
AF7D6020B24L		24	18~26.5	0.03	0.72	3500	0.330	11.70	2.86	0.113	29.9
AF7D6020B24LM		24	18~26.5	0.04	0.96	4000	0.382	13.40	3.70	0.146	33.1
AF7D6020B24M		24	18~26.5	0.05	1.20	4500	0.429	15.10	4.71	0.185	36.5

AF7D6020B24H	B=Ball S=Sleeve	24	18~26.5	0.06	1.44	5000	0.482	17.00	5.78	0.228	38.5
--------------	--------------------	----	---------	------	------	------	-------	-------	------	-------	------


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引： 编码规则Code Rule

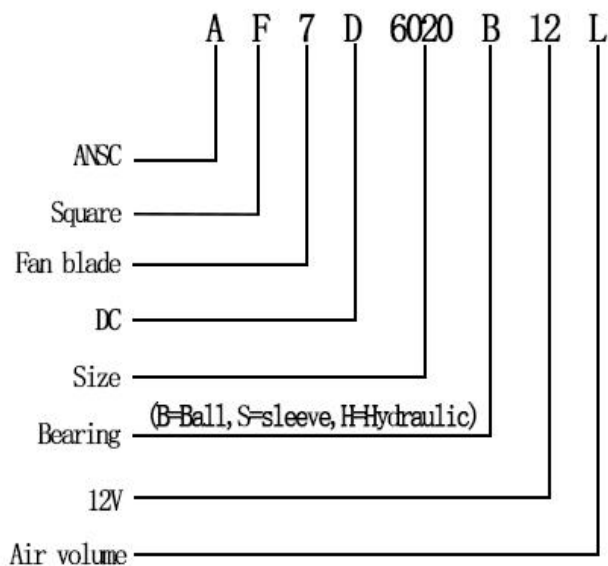

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>