



## DC Blower fan

AG7525B 75\*75\*25mm

Motor:DC

Bearing:Ball、Sleeve、Hydraulic

Shell frame: PBT UL94V-0

Fan blade: PBT UL94V-0

Insulation:Class B


Wire:AWG#26UL1007 (optional)

PIN1:BLACK WIRE----(-)


PIN2:RED WIRE----(+)



DIMENSIONS DRAWING(unit:mm)

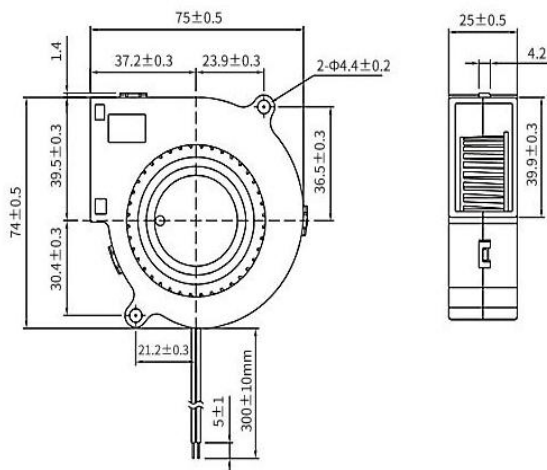

P@Q CURVE(AT RATED VOLTAGE)

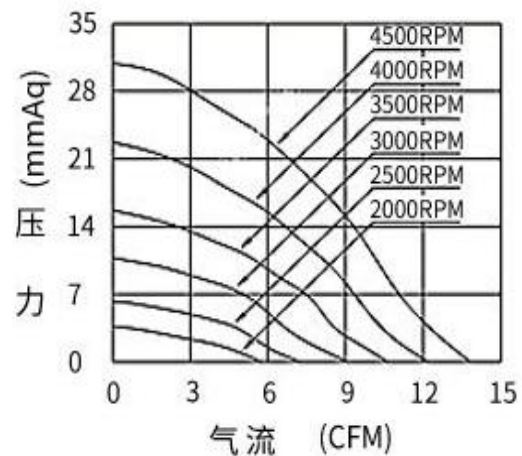

Model	Bearing Mode①	Rate d Volt	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AG7525B12L	B=Ball S=Sleeve H=Hydraulic	12	7.5~13.5	0.04	0.48	2000	0.163	5.77	3.65	0.143	31.7
AG7525B12M		12	7.5~13.5	0.1	1.20	2500	0.205	7.27	6.22	0.244	35.4
AG7525B12H		12	7.5~13.5	0.17	2.04	3000	0.257	9.11	10.75	0.423	40.5
AG7525B12HH		12	7.5~13.5	0.26	3.12	3500	0.301	10.6	15.75	0.62	44.3
AG7525B12VH		12	7.5~13.5	0.43	5.16	4000	0.347	12.2	22.71	0.894	47.7
AG7525B12HV		12	7.5~13.5	0.64	7.68	4500	0.393	13.9	30.97	1.219	51.7
AG7525B24L		24	18~26.5	0.02	0.48	2000	0.163	5.77	3.65	0.143	31.7

AG7525B24M	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	0.05	1.20	2500	0.205	7.27	6.22	0.244	35.4
AG7525B24H		24	18~26.5	0.09	2.16	3000	0.257	9.11	10.75	0.423	40.5
AG7525B24HH		24	18~26.5	0.13	3.12	3500	0.301	10.6	15.75	0.62	44.3
AG7525B24VH		24	18~26.5	0.22	5.28	4000	0.347	12.2	22.71	0.894	47.7
AG7525B24HV		24	18~26.5	0.32	7.68	4500	0.393	13.9	30.97	1.219	51.7


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL) Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引: 编码规则Code Rule

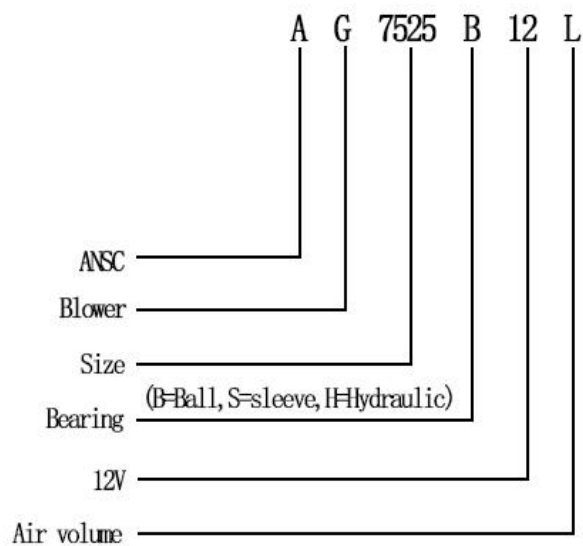

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>