





DC BRUSHLESS FAN

AF7D8032B 80*80*32mm


Motor:DC Brushless
 Bearing:Ball、sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE----(-)
 PIN2:RED WIRE----(+)



DIMENSIONS DRAWING(unit:mm)

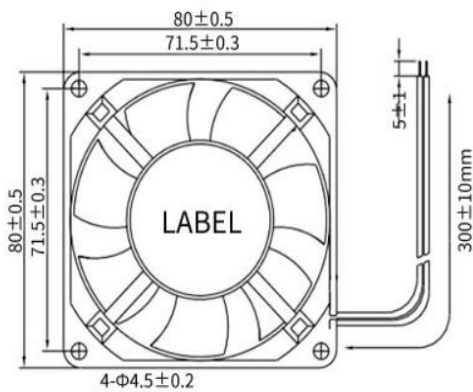

P@Q CURVE(AT RATED VOLTAGE)

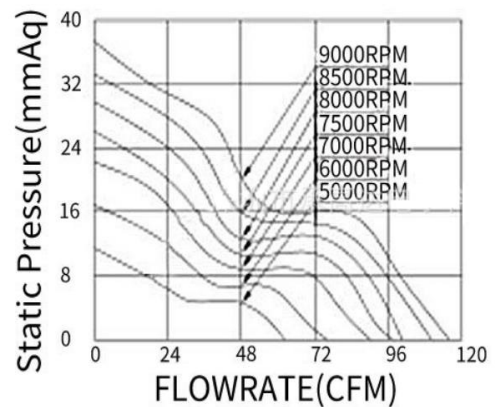

Model	Bearing Mode①	Rated Volt	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M					dB-A
AF7D8032B12L	B=Ball S=Sleeve H=Hydraulic	12	7~13.5	0.4	4.80	4000	1.413	49.89	8.51	0.335	46.8
AF7D8032B12M		12	7~13.5	0.68	8.16	5000	1.736	61.29	11.63	0.458	50.3
AF7D8032B12H		12	7~13.5	0.96	11.50	6000	2.138	75.50	16.78	0.661	52.0
AF7D8032B12HH		12	7~13.5	1.24	14.90	7000	2.518	88.93	22.39	0.881	54.2
AF7D8032B12VH		12	7~13.5	1.51	18.20	8000	2.856	#####	29.53	1.163	61.2
AF7D8032B12HV		12	7~13.5	1.84	22.10	8500	3.034	#####	32.90	1.295	63.5
AF7D8032B24L		24	18~26.5	0.2	4.80	4000	1.413	49.89	8.51	0.335	46.8

AF7D8032B24M	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	0.34	8.16	5000	1.736	61.29	11.63	0.458	50.3
AF7D8032B24H		24	18~26.5	0.48	11.50	6000	2.138	75.50	16.78	0.661	52.0
AF7D8032B24HH		24	18~26.5	0.62	14.90	7000	2.518	88.93	22.39	0.881	54.2
AF7D8032B24VH		24	36~54	0.76	18.20	8000	2.856	#####	29.53	1.163	61.2
AF7D8032B24HV		24	18~26.5	0.92	22.10	8500	3.034	#####	32.90	1.295	63.5
AF7D8032B48L		48	36~54	0.1	4.80	4000	1.413	49.89	8.51	0.335	46.8
AF7D8032B48M		48	36~54	0.17	8.16	5000	1.736	61.29	11.63	0.458	50.3
AF7D8032B48H		48	36~54	0.24	11.50	6000	2.138	75.50	16.78	0.661	52.0
AF7D8032B48HH		48	36~54	0.31	14.90	7000	2.518	88.93	22.39	0.881	54.2
AF7D8032B48VH		48	36~54	0.38	18.20	8000	2.856	#####	29.53	1.163	61.2
AF7D8032B48HV		48	36~54	0.46	22.10	8500	3.034	#####	32.90	1.295	63.5


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引: 编码规则Code Rule

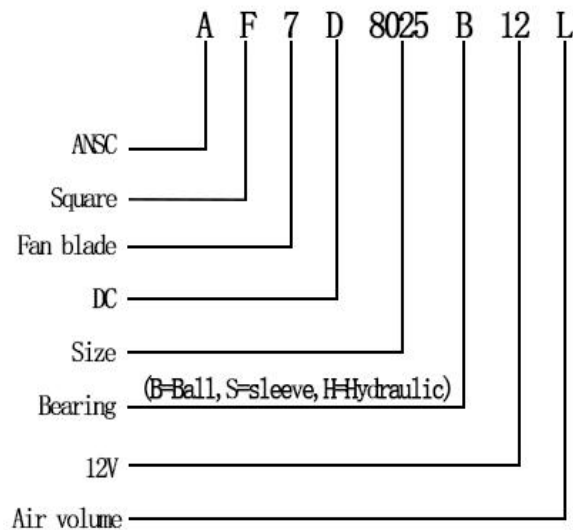

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>