




EC Brushless FAN

AF7E9225B 92*92*25MM


Motor: EC Brushless
 Bearing: Ball, sleeve, Hydraulic
 Shell frame: PBT UL94V_0
 Fan blade: PBT UL94V_0
 Insulation: Class B
 Wire: AWG#26UL1007 (optional)
 PIN1: BLACK WIRE----(-)
 PIN2: RED WIRE----(+)



DIMENSIONS DRAWING(unit:mm)

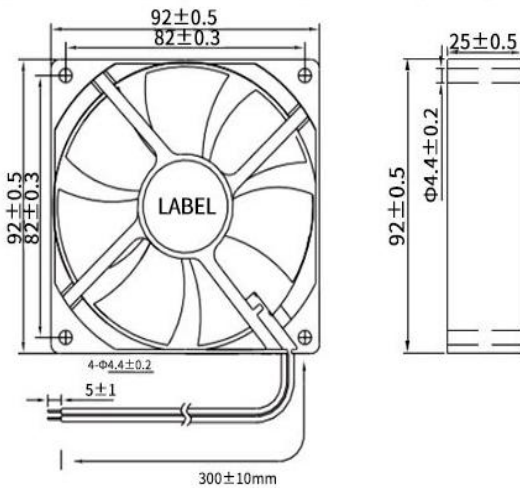

P@Q CURVE(AT RATED VOLTAGE)

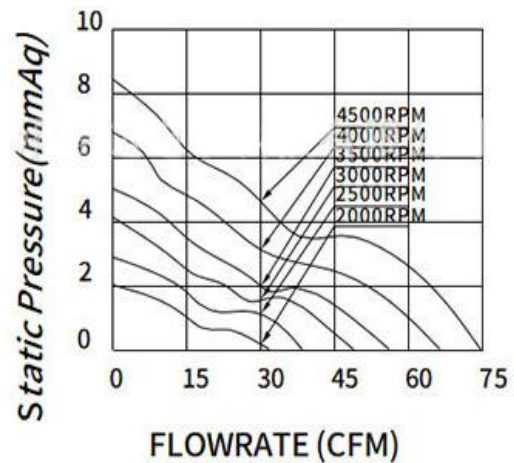

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	lnH2O	dB-A
AF7E9225B220L	B=Ball S=Sleeve H=Hydraulic	220	80~230	0.01	2.2	2500	1.326	46.8	3.98	0.157	35.5
AF7E9225B220M		220	80~230	0.01	2.2	3000	1.605	56.6	5.71	0.225	41.1
AF7E9225B220H		220	80~230	0.01	2.2	3500	1.959	69.1	7.81	0.307	45.5
AF7E9225B220HH		220	80~230	0.02	4.4	4000	2.189	77.3	10.08	0.397	48.3
AF7E9225B220HV		220	80~230	0.02	4.4	4500	2.482	87.6	12.87	0.507	53.7
AF7E9225B220VH		220	80~230	0.02	6.6	5000	2.745	96.9	15.57	0.613	55


① Bearing Mode: Ball/ Sleeve/ Hydraulic/ Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

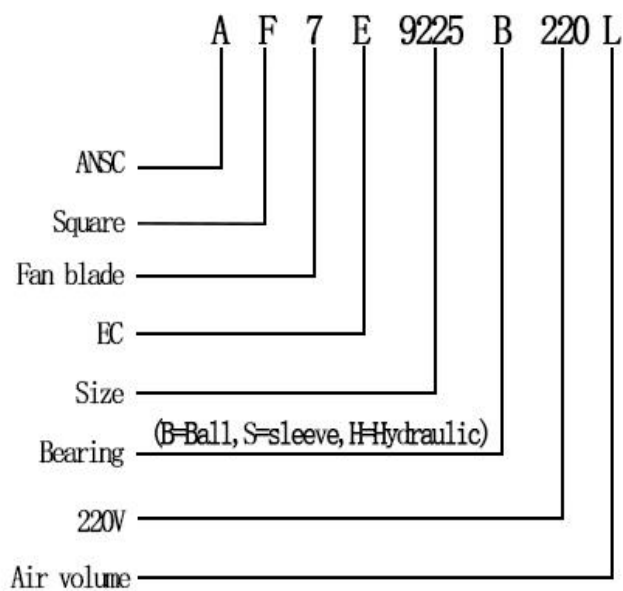

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>