




## DC Brushless FAN

**A9Z8015B 80\*80\*15mm**


Motor:DC Brushless  
 Bearing:Ball、sleeve、Hydraulic  
 Shell frame: PBT UL94V\_0  
 Fan blade: PBT UL94V\_0  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE----(-)  
 PIN2:RED WIRE----(+)



**DIMENSIONS DRAWING(unit:mm)**

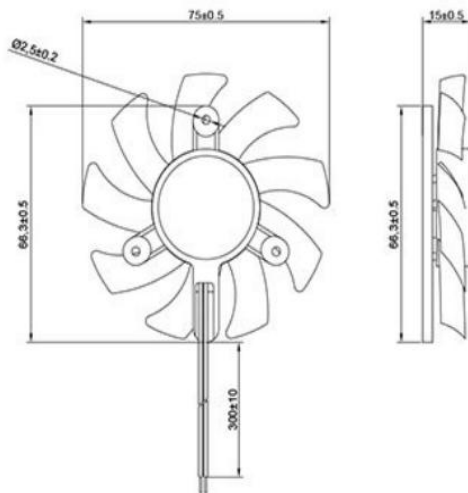

**P@Q CURVE(AT RATED VOLTAGE)**

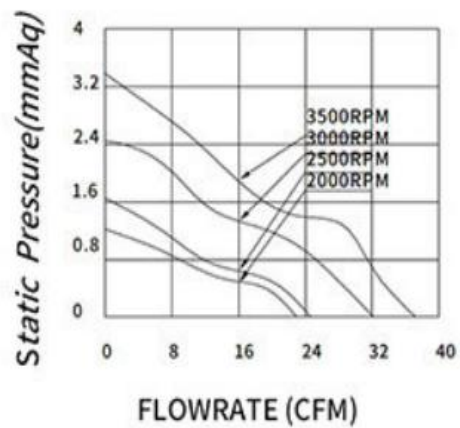

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	lnH2O	dB-A
A9Z8015B05L	B=Ball S=Sleeve H=Hydraulic	5	1.8~3~6	0.24	1.2	2000	0.028	22.8	1.22	0.048	30.4
A9Z8015B12L		12	7~13.5	0.1	1.2	2000	0.029	22.8	1.2	0.073	30.4
A9Z8015B12M		12	7~13.5	0.13	1.56	2500	0.041	25	1.65	0.128	33.5
A9Z8015B12H		12	7~13.5	0.21	2.52	3000	0.049	31.9	2.44	0.153	36.2
A9Z8015B12HH		12	7~13.5	0.3	3.6	3500	0.067	36.6	3.38	0.27	40.3
A9Z8015B24L		24	18~26.5	0.06	1.44	2000	0.029	22.8	1.2	0.073	30.4

A9Z8015B24M	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	0.08	1.92	2500	0.041	25	1.65	0.128	33.5
A9Z8015B24H		24	18~26.5	0.1	2.4	3000	0.049	31.9	2.44	0.153	36.2
A9Z8015B24HH		24	18~26.5	0.18	4.32	3500	0.067	36.6	3.38	0.27	40.3


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引: 编码规则Code Rule

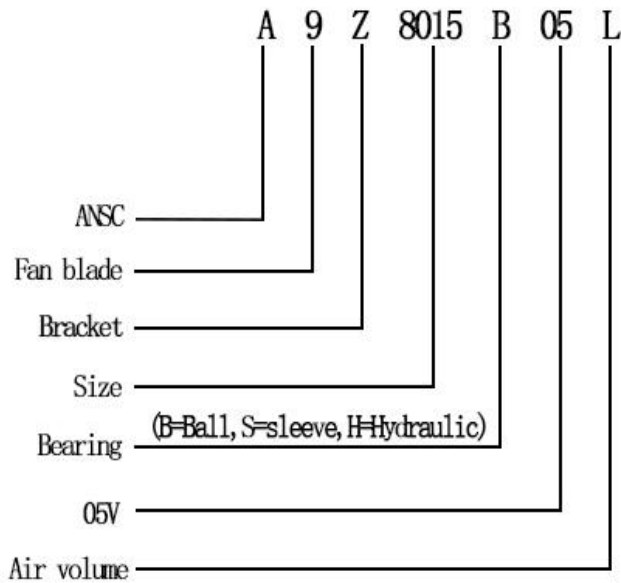

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>