




DC BRUSHLESS FAN

AF7D12038B 120*120*38mm


Motor:DC Brushless
 Bearing:Ball、sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

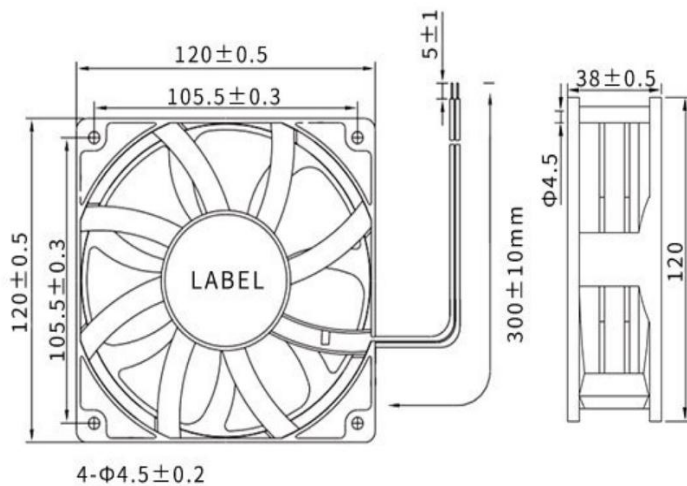

P@Q CURVE(AT RATED VOLTAGE)

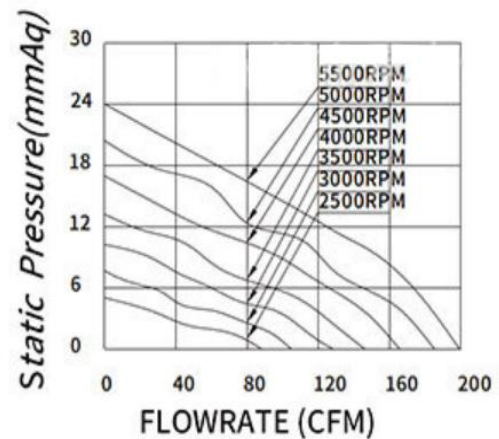

Model	Bearing Mode①	Rated Volt	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Walt	R. P. M	M3/min	CFM	mmH2O	InH2O	
PART. NO.											
AF7D12038B12L	B=Ball S=Sleeve H=Hydraulic	12	8~13.5	0.3	3.60	2500	2.734	96.55	5.91	0.233	43.4
AF7D12038B12M		12	8~13.5	0.6	7.20	3000	3.151	111.26	8.66	0.341	47.7
AF7D12038B12VM		12	8~13.5	0.9	10.80	3500	3.742	132.14	11.94	0.47	52.8
AF7D12038B12H		12	8~13.5	1.2	14.40	4000	4.330	152.89	15.46	0.609	54.5
AF7D12038B12HH		12	8~13.5	1.5	18.00	4500	4.797	169.37	19.73	0.777	58.1
AF7D12038B12VH		12	8~13.5	1.8	21.60	5000	5.380	189.97	24.40	0.961	62.1
AF7D12038B12HV		12	8~13.5	2	24.00	5500	5.945	209.92	29.28	1.153	65.2

AF7D12038B24L	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	0.15	3.60	2500	2.734	96.55	5.91	0.233	43.4
AF7D12038B24M		24	18~26.5	0.3	7.20	3000	3.151	111.26	8.66	0.341	47.7
AF7D12038B24VM		24	18~26.5	0.45	10.80	3500	3.742	132.14	11.94	0.47	52.8
AF7D12038B24H		24	18~26.5	0.6	14.40	4000	4.330	152.89	15.46	0.609	54.5
AF7D12038B24HH		24	18~26.5	0.75	18.00	4500	4.797	169.37	19.73	0.777	58.1
AF7D12038B24VH		24	18~26.5	0.9	21.60	5000	5.380	189.97	24.40	0.961	62.1
AF7D12038B24HV		24	18~26.5	1	24.00	5500	5.945	209.92	29.28	1.153	65.2
AF7D12038B48L		48	36~54	0.075	3.60	2500	2.734	96.55	5.91	0.233	43.4
AF7D12038B48M		48	36~54	0.15	7.20	3000	3.151	111.26	8.66	0.341	47.7
AF7D12038B48VM		48	36~54	0.225	10.80	3500	3.742	132.14	11.94	0.47	52.8
AF7D12038B48H		48	36~54	0.3	14.40	4000	4.330	152.89	15.46	0.609	54.5
AF7D12038B48HH		48	36~54	0.375	18.00	4500	4.797	169.37	19.73	0.777	58.1
AF7D12038B48VH		48	36~54	0.45	21.60	5000	5.380	189.97	24.40	0.961	62.1
AF7D12038B48HV		48	36~54	0.5	24.00	5500	5.945	209.92	29.28	1.153	65.2


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引：编码规则Code Rule

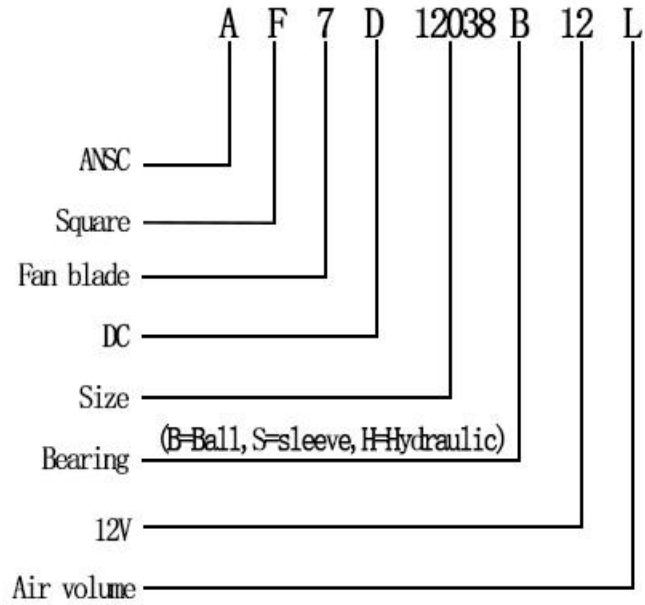

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>