

AG5020B12H	B=Ball S=Sleeve H=Hydraulic	12	7~13.5	0.26	3.12	5500	0.102	3.60	10.81	0.426	39.9
AG5020B12HH		12	7~13.5	0.3	3.60	6000	0.107	3.79	13.33	0.525	42.7
AG5020B24L		24	18~26.5	0.07	1.68	4000	0.060	2.13	4.00	0.157	31.5
AG5020B24LL		24	18~26.5	0.09	2.16	4500	0.086	3.04	6.68	0.263	34.2
AG5020B24M		24	18~26.5	0.11	2.64	5000	0.096	3.40	8.56	0.337	38.9
AG5020B24H		24	18~26.5	0.13	3.12	5500	0.102	3.60	10.81	0.426	39.9
AG5020B24HH		24	18~26.5	0.15	3.60	6000	0.107	3.79	13.33	0.525	42.7


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引： 编码规则Code Rule

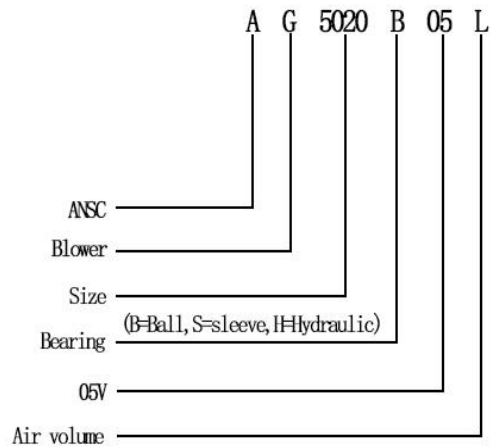

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>