




EC Brushless FAN

AF7E12038B 120*120*38MM


Motor: EC Brushless
 Bearing: Ball, sleeve, Hydraulic
 Shell frame: PBT UL94V_0
 Fan blade: PBT UL94V_0
 Insulation: Class B
 Wire: AWG#26UL1007 (optional)
 PIN1: BLACK WIRE---(-)
 PIN2: RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

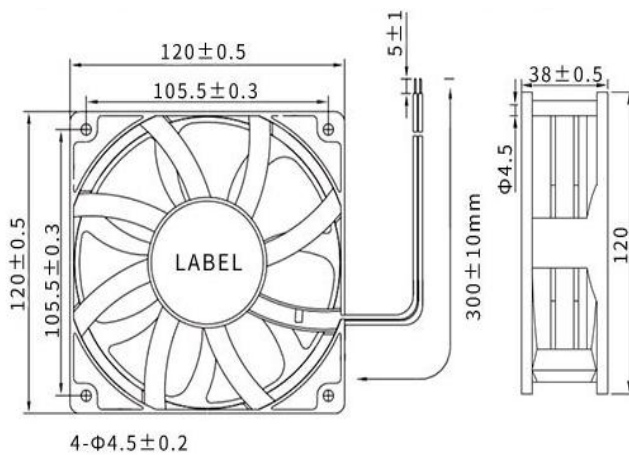

P@Q CURVE(AT RATED VOLTAGE)

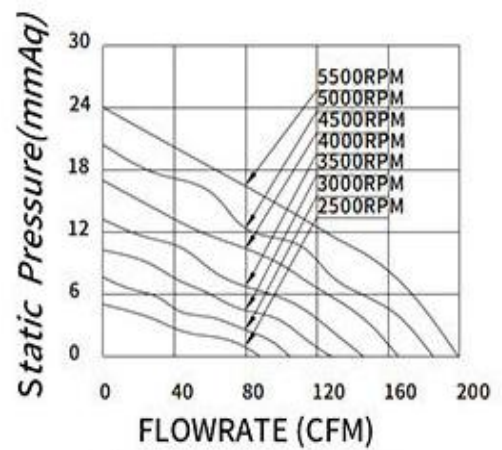

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH20	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH20	InH20	dB-A
AF7E12038B220L	B=Ball S=Sleeve H=Hydraulic	220	80~230	0.04	8.8	2500	2.734	96.55	5.91	0.233	43.4
AF7E12038B220M		220	80~230	0.05	1.1	3000	3.151	111.26	8.66	0.341	47.7
AF7E12038B220V		220	80~230	0.07	15.4	3500	3.742	132.14	11.94	0.47	52.8
AF7E12038B220H		220	80~230	0.08	17.6	4000	4.33	152.89	15.46	0.609	54.5
AF7E12038B220H		220	80~230	0.1	22	4500	4.797	169.37	19.73	0.777	58.1
AF7E12038B220V		220	80~230	0.13	28.6	5000	5.38	189.97	24.4	0.961	62.1


① Bearing Mode: Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引：编码规则Code Rule

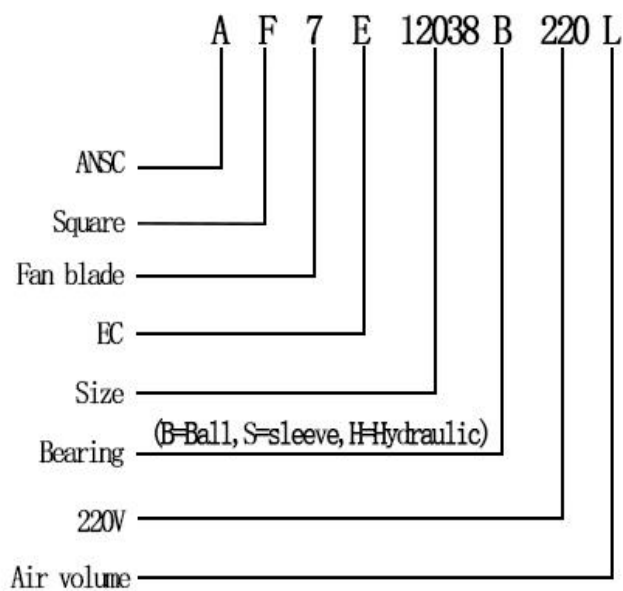

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>