




DC Blower fan

AG3015S 30*30*15MM


Motor:DC
 Bearing:Sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE----(-)
 PIN2:RED WIRE----(+)



DIMENSIONS DRAWING(unit:mm)

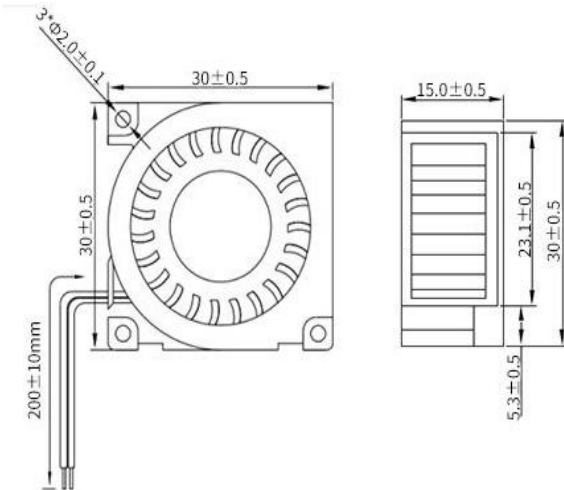

P@Q CURVE(AT RATED VOLTAGE)

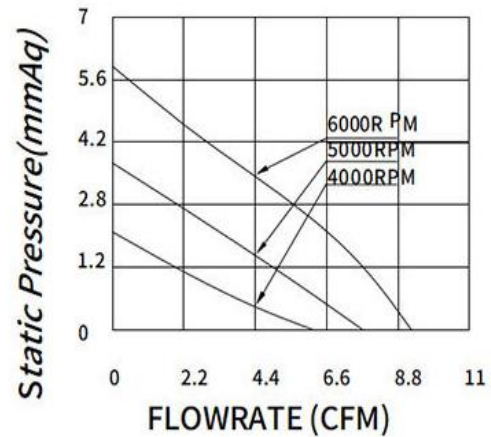

Model	Bearing Mode①	Rated Volt	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M					dB-A
AG3015S05L	B=Ball S=Sleeve H=Hydraulic	5	1.8~3.6~6.8	0.1	0.50	4000	0.030	1.07	2.18	0.086	17.9
AG3015S05M		5	1.8~3.6~6.8	0.12	0.60	5000	0.040	1.40	3.66	0.144	21.1
AG3015S05H		5	1.8~3.6~6.8	0.13	0.65	6000	0.048	1.70	6.04	0.238	25.3
AG3015S12L		12	7~13.5	0.042	0.50	4000	0.030	1.07	2.18	0.086	17.9
AG3015S12M		12	7~13.5	0.05	0.60	5000	0.040	1.40	3.66	0.144	21.1
AG3015S12H		12	7~13.5	0.054	0.65	6000	0.048	1.70	6.04	0.238	25.3


① Bearing Mode: Ball/ Sleeve/ Hydraulic/ Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

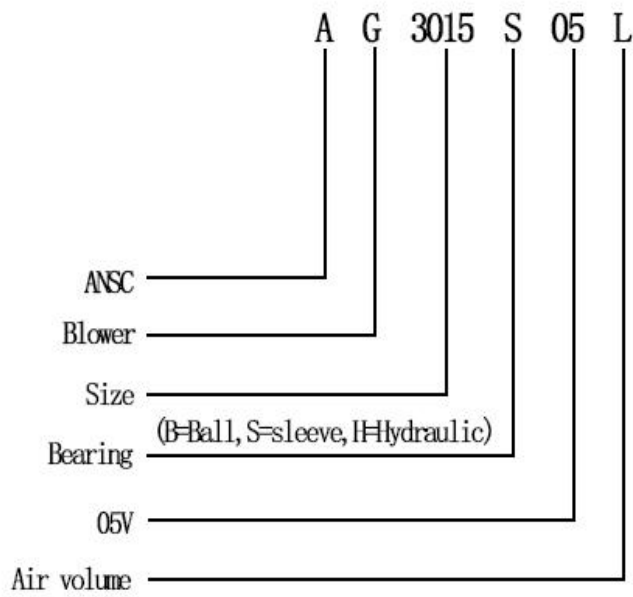

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>