




DC BRUSHLESS FAN

AF9D2006H 20*20*6mm


Motor:DC Brushless
 Bearing:Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

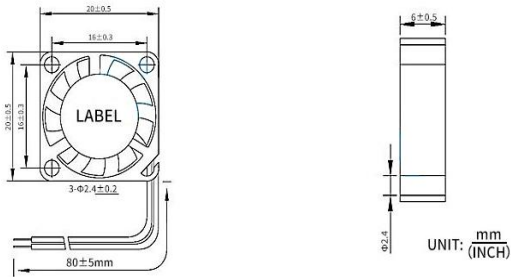

P@Q CURVE(AT RATED VOLTAGE)

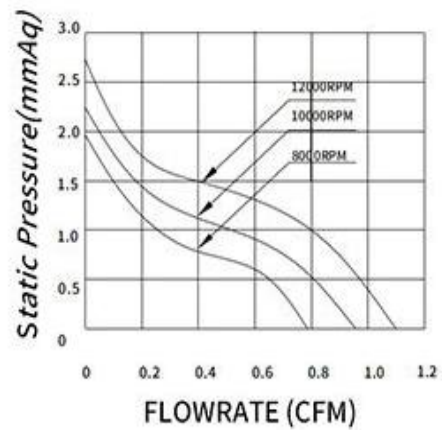

Model	Bearing Mode①	Rated Volt	Operating voltage	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.											
AF9D2006H05L	B=Ball S=Sleeve H=Hydraulic	5	1.8~3.6	0.08	0.40	8000	0.022	0.79	1.95	0.077	21.5
AF9D2006H05M		5	1.8~3.6	0.12	0.60	10000	0.027	0.95	2.22	0.087	25.6
AF9D2006H05H		5	1.8~3.6	0.16	0.80	12000	0.032	1.12	2.69	0.106	31.2
AF9D2006H12L		12	8.5~13.5	0.04	0.48	8000	0.022	0.79	1.95	0.077	21.5
AF9D2006H12M		12	8.5~13.5	0.06	0.72	10000	0.027	0.95	2.22	0.087	25.6
AF9D2006H12H		12	8.5~13.5	0.1	1.20	12000	0.032	1.12	2.69	0.106	31.2


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC GS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引： 编码规则 Code Rule

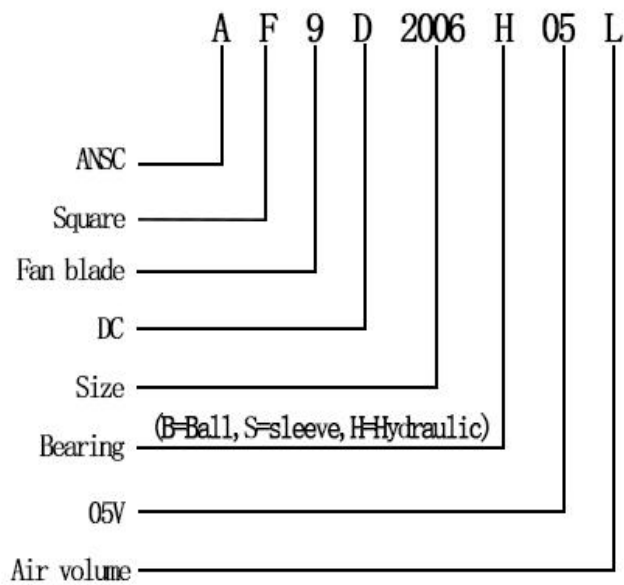

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>