




## EC Brushless FAN

AF7E7025B 70\*70\*25mm


Motor:EC Brushless  
 Bearing:Ball  
 Shell frame: PBT UL94V\_0  
 Fan blade: PBT UL94V\_0  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE----(-)  
 PIN2:RED WIRE----(+)



**DIMENSIONS DRAWING(unit:mm)**

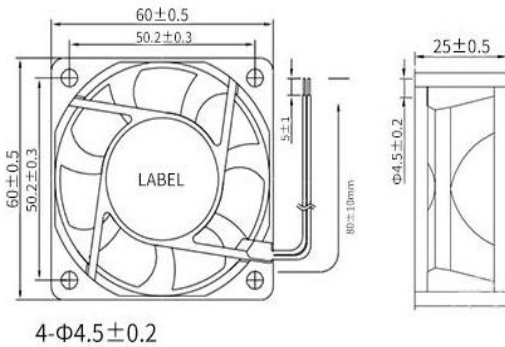

**P@Q CURVE(AT RATED VOLTAGE)**

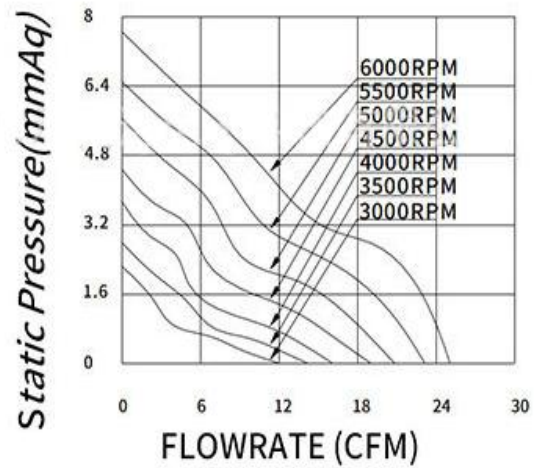

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH20	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH20	InH20	dB-A
AF7E7025B220L	B=Ball S=Sleeve H=Hydraulic	220	80~230	0.01	2.2	3500	0.886	31.2	3.84	0.151	36
AF7E7025B220M		220	80~230	0.01	2.2	4000	1.022	36	5.09	0.2	40.9
AF7E7025B220H		220	80~230	0.02	4.4	3500	1.147	40.5	6.29	0.248	43
AF7E7025B220HH		220	80~230	0.04	8.8	4000	1.274	44.9	7.8	0.307	47.3


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引： 编码规则Code Rule

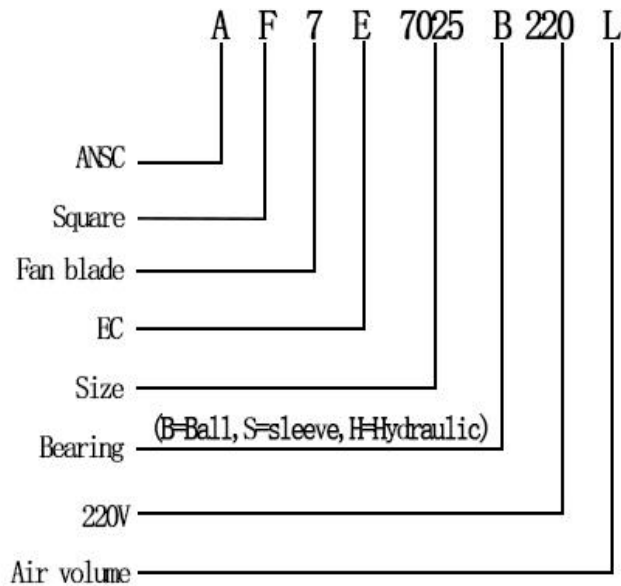

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>