




DC BRUSHLESS FAN

AF7D3007H 30*30*7mm


Motor:DC Brushless
 Bearing:Ball、sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

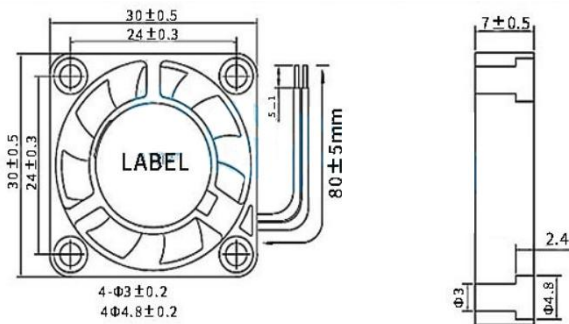

P@Q CURVE(AT RATED VOLTAGE)

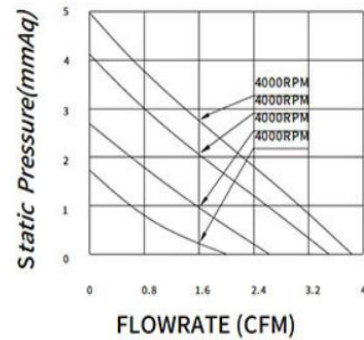

Model	Bearing Mode①	Rated Volt	Operating voltage	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AF7D3007H05L	B=Ball S=Sleeve H=Hydraulic	5	1.8~3.6	0.14	0.72	6000	0.056	1.99	1.71	0.067	25.5
AF7D3007H05M		5	1.8~3.6	0.17	0.84	8000	0.075	2.66	2.70	0.106	27.4
AF7D3007H05H		5	1.8~3.6	0.19	0.96	10000	0.098	3.46	4.13	0.163	30.1
AF7D3007H05HH		5	1.8~3.6	0.22	1.08	11000	0.107	3.78	4.94	0.194	32.0
AF7D3007H05VH		5	1.8~3.6	0.24	1.20	13000	0.120	4.25	8.25	0.325	34.9
AF7D3007H12L		12	8.5~13.5	0.06	0.72	6000	0.056	1.99	1.71	0.067	25.5
AF7D3007H12M		12	8.5~13.5	0.07	0.84	8000	0.075	2.66	2.70	0.106	27.4
AF7D3007H12H		12	8.5~13.5	0.08	0.96	10000	0.098	3.46	4.13	0.163	30.1

AF7D3007H12HH	B=Ball S=Sleeve H=Hydraulic	12	8.5~13.5	0.09	1.08	11000	0.107	3.78	4.94	0.194	32.0
AF7D3007H12VH		12	8.5~13.5	0.1	1.20	13000	0.120	4.25	8.25	0.325	34.9


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement,Service life, Temperature, Noise, Material, Mold.etc.

导引： 编码规则Code Rule

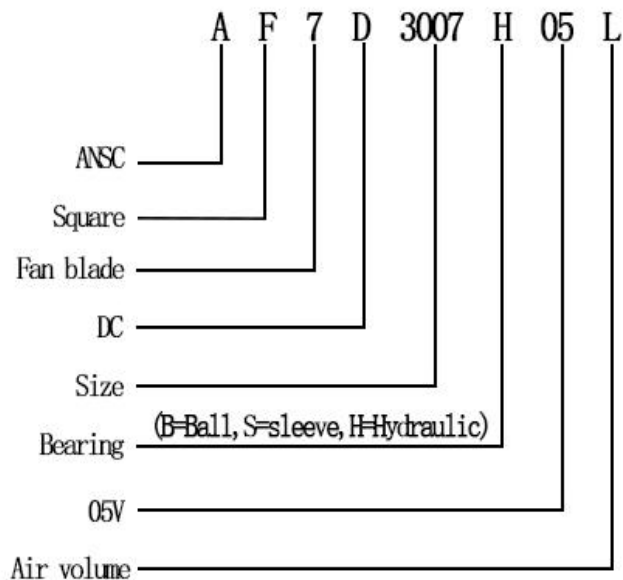

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>