




## DC BRUSHLESS FAN

**AF9D14050B 140\*140\*50mm**

Motor:DC Brushless  
 Bearing:Ball、sleeve、Hydraulic  
 Shell frame: PBT UL94V-0  
 Fan blade: PBT UL94V-0  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE---(-)  
 PIN2:RED WIRE---(+)



**DIMENSIONS DRAWING(unit:mm)**

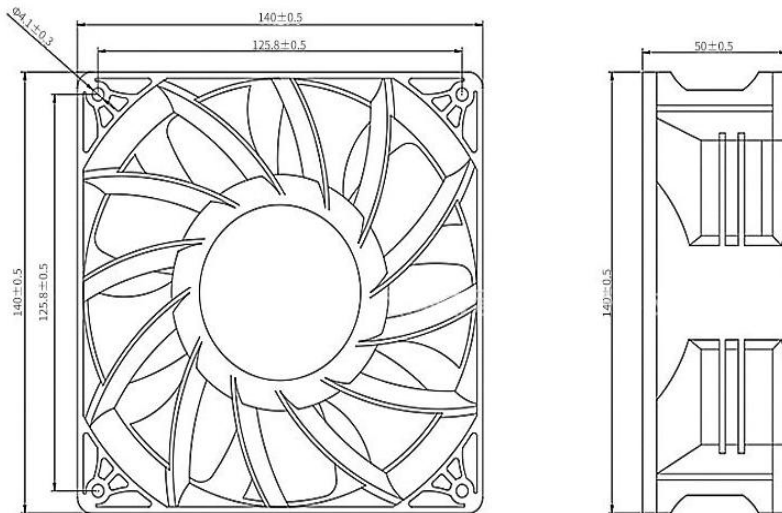

Model	Bearing Mode①	Rated	Operatin	Rated	Rated	Speed	Maximum		Maximum		Noise
		Volt	g voltage	current	input power		air Flow	Air pressure	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Walt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AF9D14050B12L	B=Ball S=Sleeve H=Hydraulic	12	7~13.5	1.8	21.60	2800	6.493	229.40	0.522	13.26	59.4
AF9D14050B12M		12	7~13.5	2.8	33.60	3200	7.503	265.10	0.67	17.03	62.5
AF9D14050B12H		12	7~13.5	3.2	38.40	3600	8.594	303.70	0.859	21.82	64.7
AF9D14050B24L		24	18~26.5	0.8	19.20	2800	6.493	229.40	0.522	13.26	59.4
AF9D14050B24M		24	18~26.5	1.1	26.40	3200	7.503	265.10	0.67	17.03	62.5
AF9D14050B24H		24	18~26.5	1.5	36.00	3600	8.594	303.70	0.859	21.82	64.7
AF9D14050B48L		48	36~54	0.36	17.28	2800	6.493	229.40	0.522	13.26	59.4

AF9D14050B48M	B=Ball S=Sleeve H=Hydraulic	48	36~54	0.51	24.48	3200	7.503	265.10	0.67	17.03	62.5
AF9D14050B48H		48	36~54	0.73	35.04	3600	8.594	303.70	0.859	21.82	64.7
AF9D14050B48HH		48	36~54	1.1	52.80	4300	#####	360.80	1.157	29.39	68.1


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引: 编码规则Code Rule

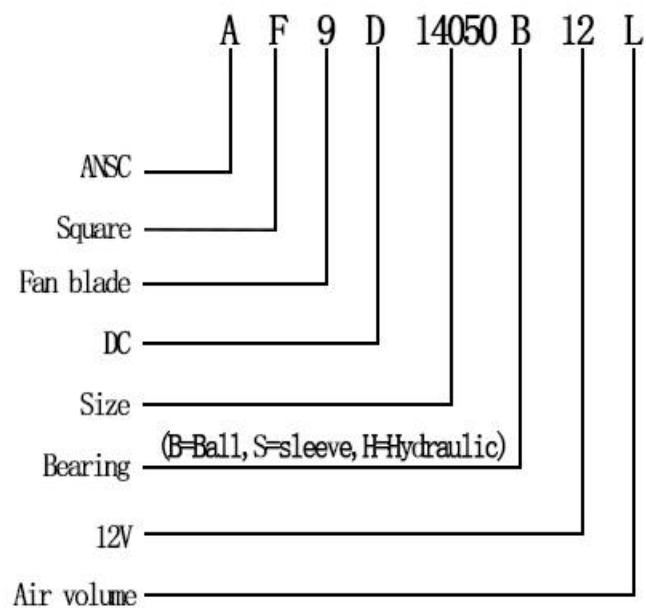

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>