




DC BRUSHLESS FAN

AQ7D15038B 150*150*38mm


Motor:DC Brushless
 Bearing:Ball、Sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

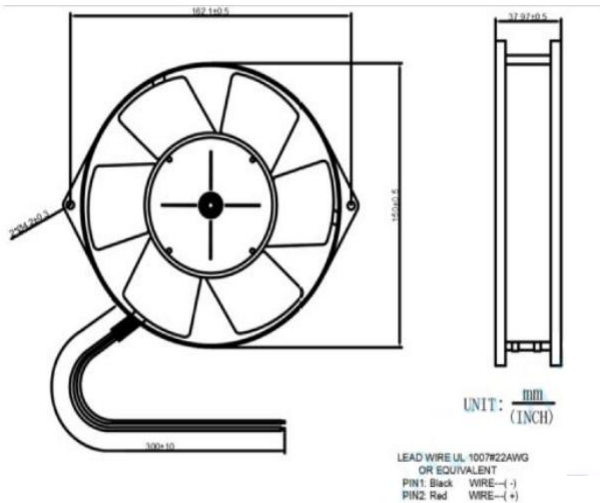

P@Q CURVE(AT RATED VOLTAGE)

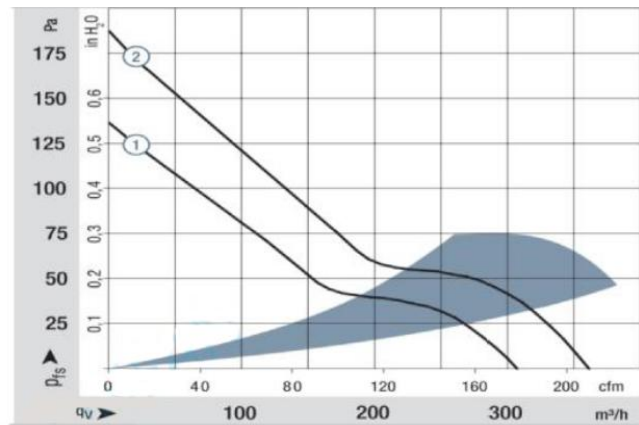

Model	Bearing Mode①	Rated	Operating	Rated	Rated	Speed	Maximum		Maximum		Noise
		d	voltage	current	input		air Flow	Air pressure	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AQ7D15038B12H	B=Ball S=Sleeve H=Hydraulic	12	6~13.5	1.40	16.8	2850	308	181	12.86	0.506	53
AQ7D15038B12HV		12	6~13.5	1.80	21.6	3350	420	247	18.38	0.724	58
AQ7D15038B24H		24	18~26.5	0.70	16.8	2850	308	181	12.86	0.506	53
AQ7D15038B24HV		24	18~26.5	0.90	21.6	3350	420	247	18.38	0.724	58
AQ7D15038B48H		48	36~54	0.35	16.8	2850	308	181	12.86	0.506	53
AQ7D15038B48HV		48	36~54	0.45	21.6	3350	420	247	18.38	0.724	58


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

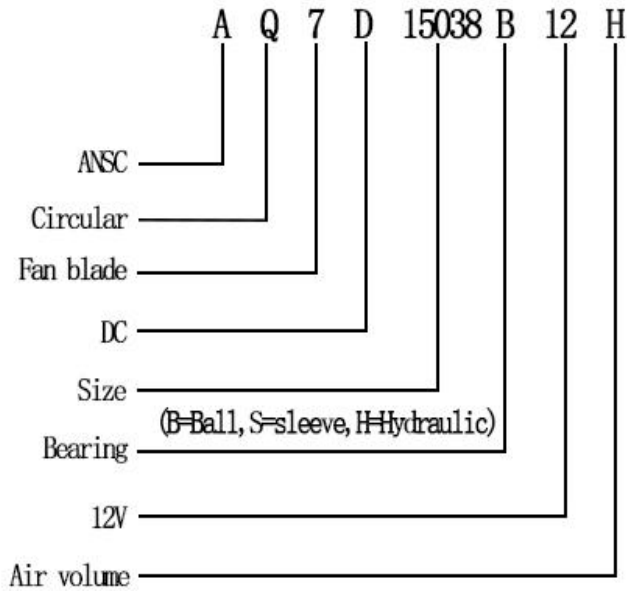

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>