



# EC Centrifugal FAN




**AQL570354B 570\*354MM**

Motor:EC Centrifugal  
 Bearing:Ball  
 Shell frame: Aluminum alloy  
 Fan blade: Aluminum alloy  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE---(-)  
 PIN2:RED WIRE---(+)



**DIMENSIONS DRAWING(unit:mm)**

**P@Q CURVE(AT RATEDVOLTAGE)**

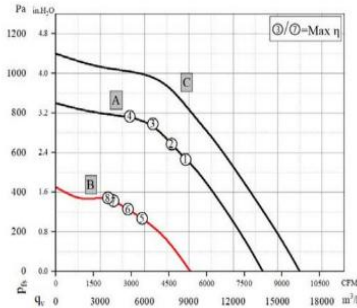

	P <sub>a</sub> (Pa)	Airflow (m <sup>3</sup> /h)	Speed (rpm)	Power (W)	Noise (dB(A))
A	⑤ 565	8780	1500	2769	76.6
	⑥ 645	7830	1500	2671	75.4
	⑦ 745	6560	1500	2467	75.6
	⑧ 785	5000	1500	2204	75.9
B	⑨ 270	5840	1005	834	72.3
	⑩ 315	4875	1005	795	71.5
	⑪ 355	3905	1005	748	70.8
	⑫ 370	3520	1005	741	71.0

●距风机出口1m处测试噪音/Test noise from fan outlet 1m away

Model	Bearing Mode①	Rated Vol	Frequency	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
PART. NO.		VDC	VAC	HZ	Watt	R. P. M	M3/min	CFM	mmH20	InH20	dB-A
AQL570354B4L	B=Ball S=Sleeve H=Hydraulic	4	3~380	50/60	729	1005	8750	/	/	/	74.1
AQL570354B10L		10	3~380	50/60	2150	1500	14000	/	/	/	82.5
AQL570354B10M		10	3~380	50/60	3130	1700	16500	/	/	/	86.5


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL) /Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引： 编码规则Code Rule

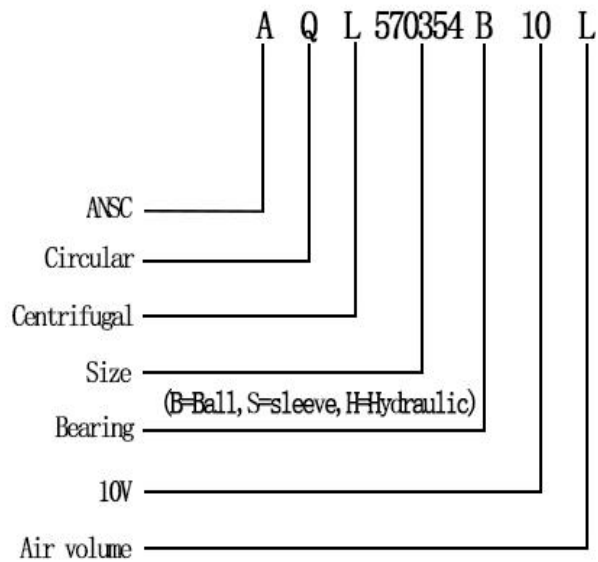

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>