



EC Centrifugal FAN




AQL355159B 355*159MM

Motor:EC Centrifugal
 Bearing:Ball
 Shell frame: Aluminum alloy
 Fan blade: Aluminum alloy
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

P@Q CURVE(AT RATEDVOLTAGE)

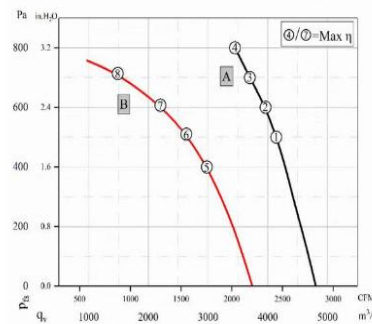

	P _s (Pa)	Airflow (m ³ /h)	Speed (rpm)	Power (W)	Noise (dB(A))
A	⑤ 500	4145	2700	1290	/
	⑥ 600	3965	2700	1364	/
	⑦ 700	3700	2700	1410	/
	⑧ 800	3450	2700	1427	/
B	⑨ 400	2980	2150	675	/
	⑩ 510	2635	2150	702	/
	⑪ 605	2205	2150	698	/
	⑫ 715	1490	2150	630	/

■距离风机出口 1m 处测试噪音/test noise from fan outlet 1 m away

Model	Bearing Mode①	Rated Vol	Frequency	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH2O	InH2O	
PART. NO.		VDC	VAC	HZ	Watt	R. P. M					dB-A
AQL355159B380H	B=Ball S=Sleeve H=Hydraulic	10	3~380	50/60	975	2700	4800	/	/	/	/
AQL355159B230H		10	1~230	50/60	498	2150	3740	/	/	/	/


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement,Service life, Temperature, Noise, Material, Mold.etc.

导引：编码规则Code Rule

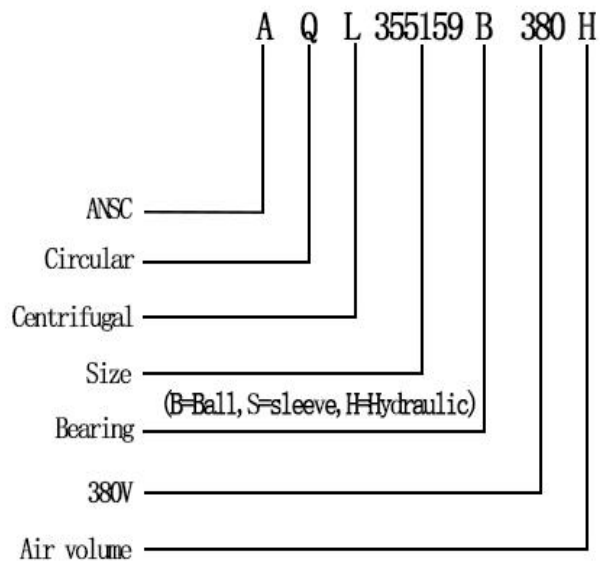

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>