




DC BLOWER FAN

AG12545B 125*38*45mm


Motor:DC Blower
 Bearing:Ball、Sleeve、Hydraulic
 Shell frame: PBT UL94V_0
 Fan blade: PBT UL94V_0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

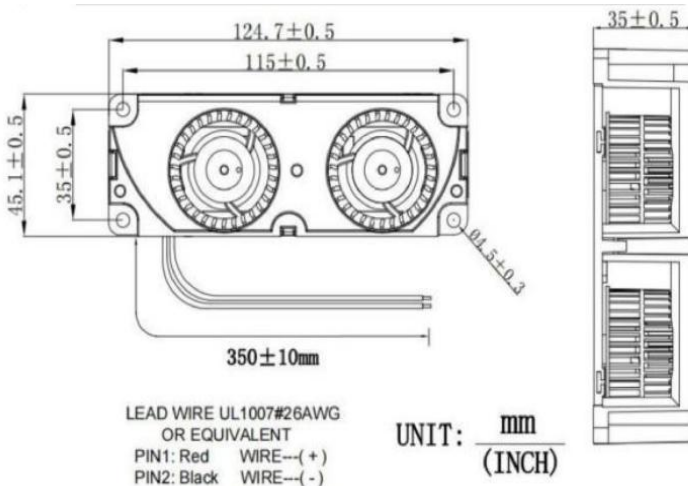

P@Q CURVE(AT RATED VOLTAGE)

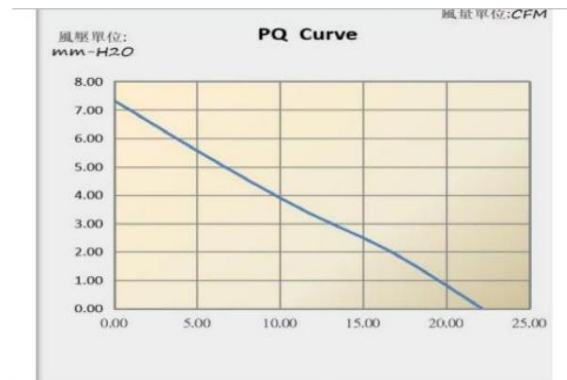

Model	Bearing Mode①	Rated Voltage	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	m ³ /min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	m ³ /min	CFM	mmH2O	InH2O	dB-A
AG12545B12L	B=Ball S=Sleeve H=Hydraulic	12	7.5~13.5	0.15	1.80	3600	0.312	11.02	3.79	0.149	30.0
AG12545B12M		12	7.5~13.5	0.20	2.40	5000	0.462	16.32	8.24	0.324	38.5
AG12545B12H		12	7.5~13.5	0.26	3.12	6600	0.627	22.17	14.78	0.582	45.4
AG12545B12HH		12	7.5~13.5	0.30	3.60	7000	0.713	25.22	16.32	0.643	49.7


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引： 编码规则Code Rule

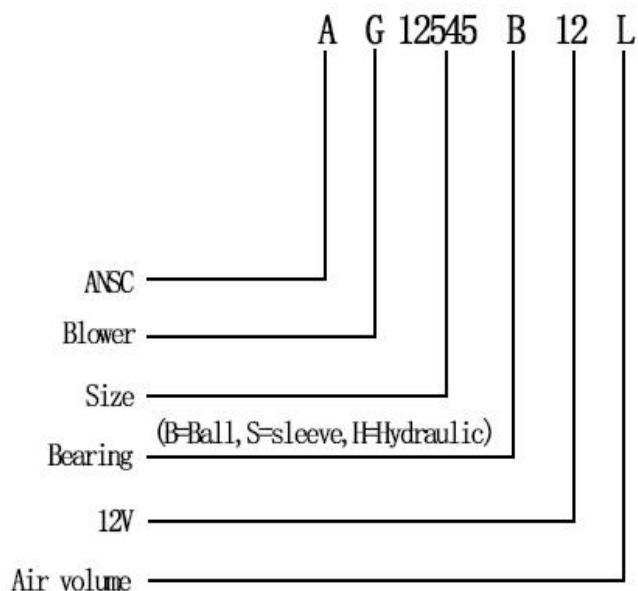

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>