





## DC BRUSHLESS FAN

AF5D2510B 25\*25\*10mm

Motor:DC Brushless  
 Bearing:Ball、sleeve、Hydraulic  
 Shell frame: PBT UL94V-0  
 Fan blade: PBT UL94V-0  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE----(-)  
 PIN2:RED WIRE----(+)



**DIMENSIONS DRAWING**(unit: mm) **P@Q CURVE(AT RATED VOLTAGE)**

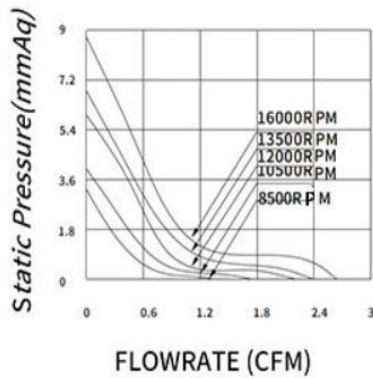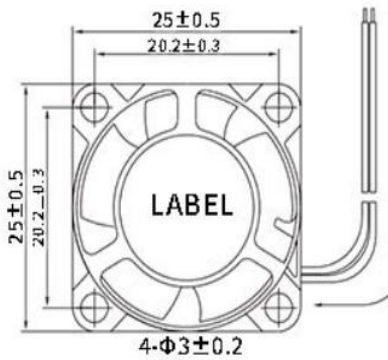

Model	Bearing Mode①	Rated Volt	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		M3/min	CFM	mmH20	InH20	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH20	InH20	dB-A
AF5D2510B05L	B=Ball S=Sleeve H=Hydraulic	5	1.8~3.6	0.14	0.72	8500	0.029	1.01	1.86	0.073	17.8
AF5D2510B05M		5	1.8~3.6	0.17	0.84	10500	0.041	1.44	3.24	0.128	27.2
AF5D2510B05H		5	1.8~3.6	0.19	0.96	12000	0.049	1.72	3.88	0.153	28.9
AF5D2510B05HH		5	1.8~3.6	0.22	1.08	13500	0.067	2.35	6.87	0.27	32.9
AF5D2510B05VH		5	1.8~3.6	0.26	1.30	15000	0.074	2.91	7.52	0.344	35.2
AF5D2510B12L		12	8.5~13.5	0.06	0.72	8500	0.029	1.01	1.86	0.073	17.8

AF5D2510B12M	B=Ball S=Sleeve H=Hydraulic	12	8.5~13.5	0.07	0.84	10500	0.041	1.44	3.24	0.128	27.2
AF5D2510B12H		12	8.5~13.5	0.08	0.96	12000	0.049	1.72	3.88	0.153	28.9
AF5D2510B12HH		12	8.5~13.5	0.09	1.08	13500	0.067	2.35	6.87	0.27	32.9
AF5D2510B12VH		12	8.5~13.5	0.1	1.20	16000	0.074	2.63	8.73	0.344	37.6


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL) Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则Code Rule

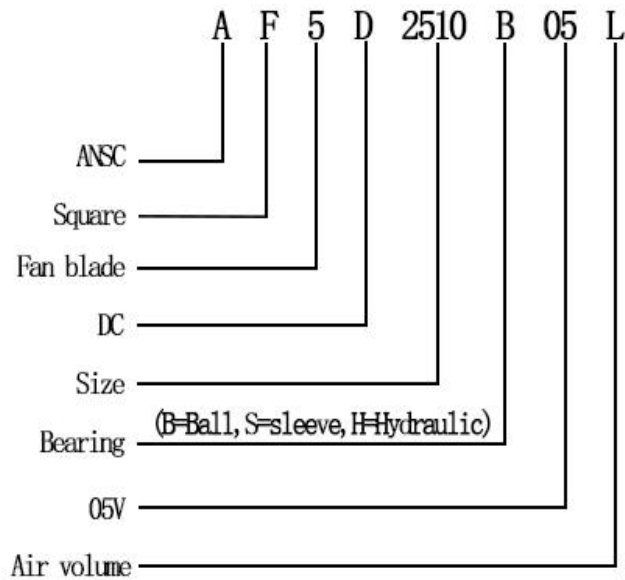

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>