




DC Centrifugal FAN

AQL15035B 150*35MM


Motor:DC Centrifugal
 Bearing:Two Ball
 Shell frame: PBT UL94V_0
 Fan blade: PBT UL94V_0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

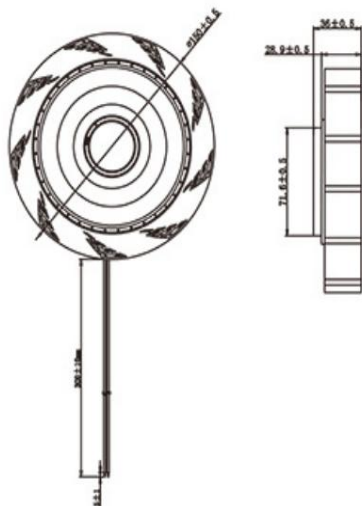

P@Q CURVE(AT RATED VOLTAGE)

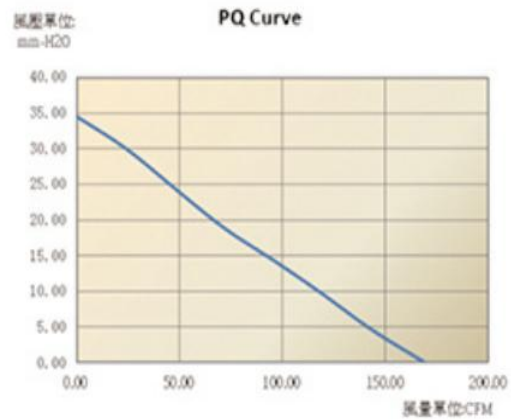

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	lnH2O	dB-A
AQL15035B24L	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	0.50	12.00	2500	3.023	106.84	14.49	0.570	39.6
AQL15035B24M		24	18~26.5	0.60	14.40	2700	3.301	116.64	17.34	0.683	43.5
AQL15035B24H		24	18~26.5	0.80	19.20	3800	4.787	169.16	34.49	1.358	59.3
AQL15035B48L		48	35~52.5	0.25	12.00	2500	3.023	106.84	14.49	0.570	39.6
AQL15035B48M		48	35~52.5	0.30	14.40	2700	3.301	116.64	17.34	0.683	42.5
AQL15035B48H		48	35~52.5	0.40	19.20	3800	4.787	169.16	34.49	1.358	59.3


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引： 编码规则 Code Rule

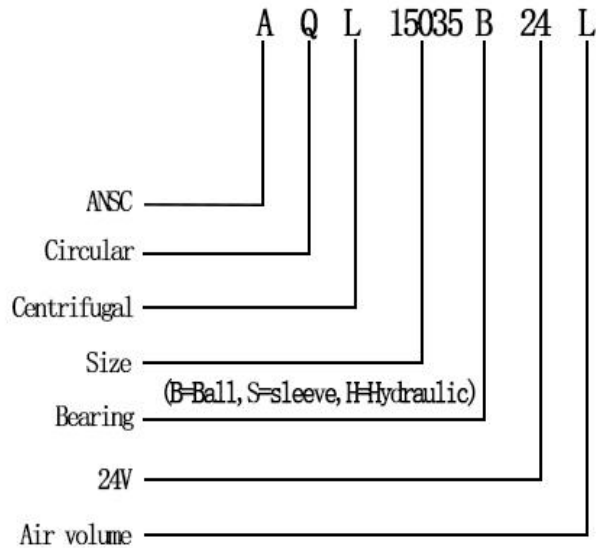

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>