




DC BRUSHLESS FAN

AF5D12038B 120*120*38mm


Motor:DC Brushless
 Bearing:Two Ball
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

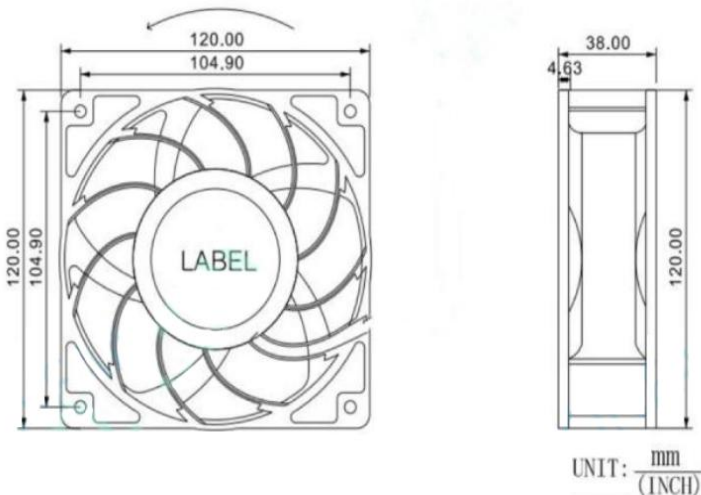

P@Q CURVE(AT RATED VOLTAGE)

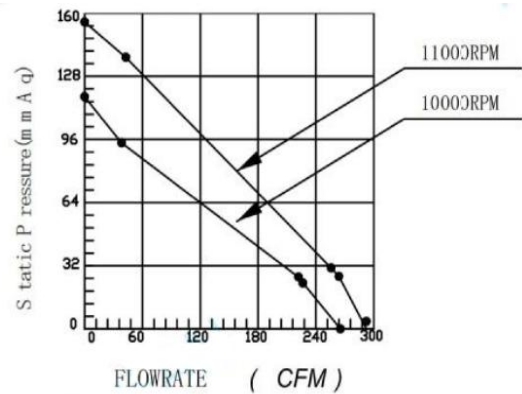

Model	Bearing Mode①	Rated	Operating	Rated	Rated	Speed	Maximum air Flow		Maximum Air pressure		Noise
		Volt	voltage range	current	input power		M3/min	CFM	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M					dB-A
AF5D12038B12VH	B=Ball S=Sleeve H=Hydraulic	12	7.5~13.5	5.2	62.4	10000	7.52	265.5	117.7	4.64	72.4
AF5D12038B12HV		12	7.5~13.5	7	84	11000	8.28	292.4	155.6	6.13	75.6
AF5D12038B24VH		24	18~26.5	2.6	62.4	10000	7.52	265.5	117.7	4.64	72.4
AF5D12038B24HV		24	18~26.5	3.5	84	11000	8.28	292.4	155.6	6.13	75.6
AF5D12038B48VH		48	36~54	1.3	62.4	10000	7.52	265.5	117.7	4.64	72.4
AF5D12038B48HV		48	36~54	1.75	84	11000	8.28	292.4	155.6	6.13	75.6


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) / Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

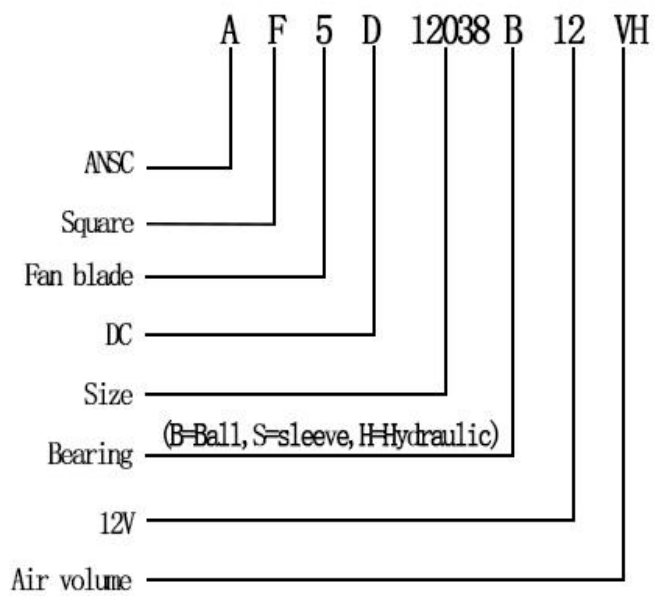

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>