




DC BRUSHLESS FAN

AF13D15038B 150*150*38mm


Motor:DC Brushless
 Bearing:Two Ball、Sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

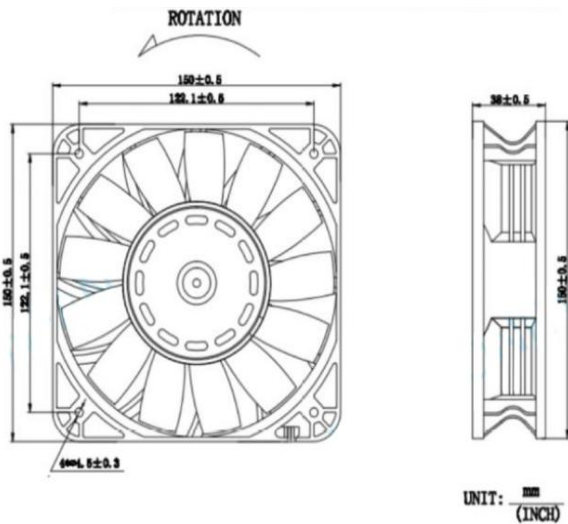

P@Q CURVE(AT RATED VOLTAGE)

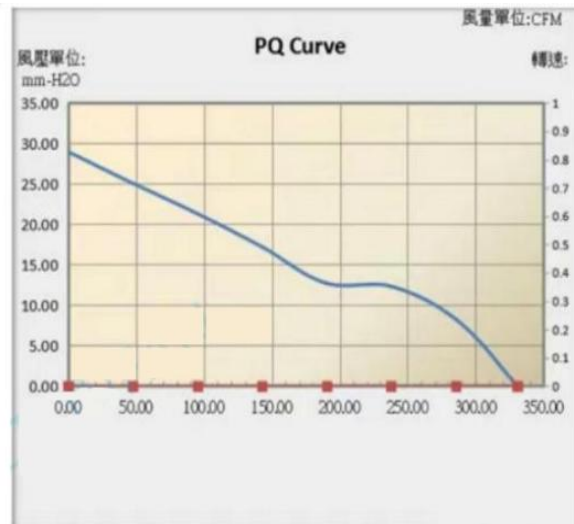

Model	Bearing Mode①	Rated Volt	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AF13D15038B12M	B=Ball S=Sleeve H=Hydraulic	12	7.5~13.5	1.80	21.6	2500	6.639	234.60	15.31	0.602	55
AF13D15038B12H		12	7.5~13.5	3.20	38.4	3500	9.359	330.71	28.95	1.139	64
AF13D15038B24M		24	18~26.5	0.90	21.6	2500	6.639	234.60	15.31	0.602	55
AF13D15038B24H		24	18~26.5	1.60	38.4	3500	9.359	330.71	28.95	1.139	64
AF13D15038B48M		48	36~54	0.45	21.6	2500	6.639	234.60	15.31	0.602	55
AF13D15038B48H		48	36~54	0.80	38.4	3500	9.359	330.71	28.95	1.139	64


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) / Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

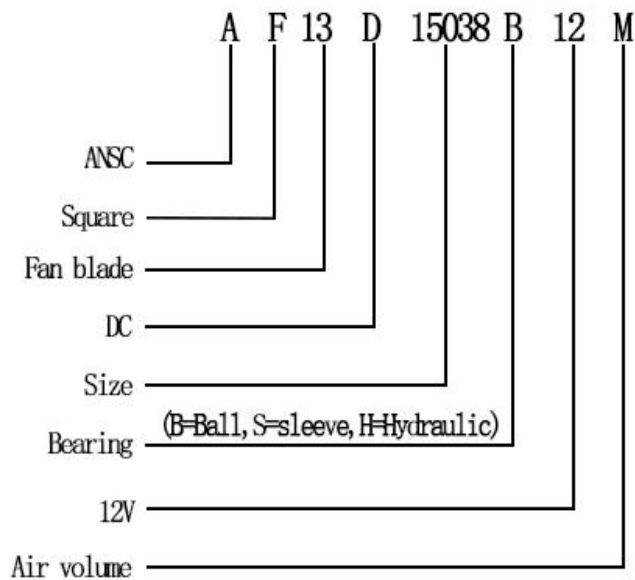

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>