




DC Centrifugal FAN

AQL13545B 135*45mm

Motor:DC Centrifugal
 Bearing:Two Ball
 Shell frame: PBT UL94V_0
 Fan blade: PBT UL94V_0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

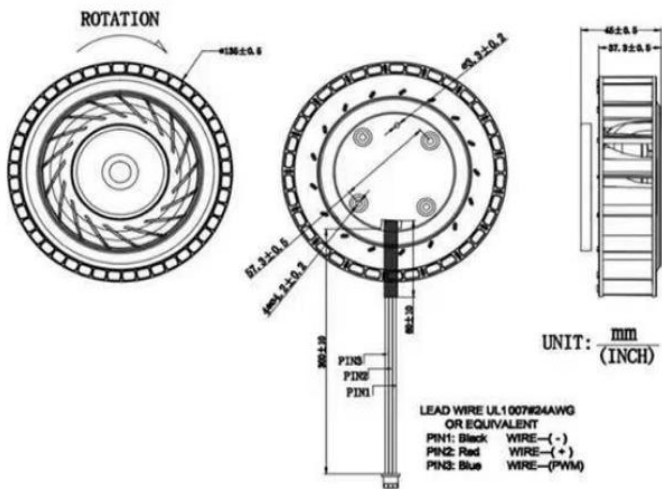

P@Q CURVE(AT RATED VOLTAGE)



Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH20	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH20	lnH20	dB-A
AQL13545B12L	B=Ball S=Sleeve H=Hydraulic	12	6~13	1.44	17.28	2000	2.7	95.67	14.37	0.56	48
AQL13545B12M		12	6~13	2.00	24.00	2500	3.213	113.55	22.37	0.88	54
AQL13545B12H		12	6~13	2.80	33.60	3000	3.66	129.41	30.15	1.18	57.8
AQL13545B24L		24	18~26.5	0.72	17.28	2000	2.7	95.67	14.37	0.56	48
AQL13545B24M		24	18~26.5	1.00	24.00	2500	3.213	113.55	22.37	0.88	54
AQL13545B24H		24	18~26.5	1.40	33.60	3000	3.66	129.41	30.15	1.18	57.8


① Bearing Mode: Ball/ Sleeve/Hydraulic/ Ball (UL)/ Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

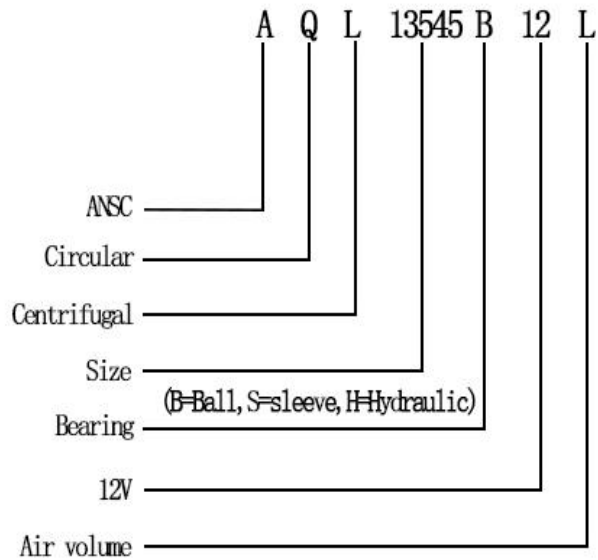

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>