




DC BRUSHLESS FAN

AF7D6015B 60*60*15mm


Motor:DC Brushless
 Bearing:Two Ball、Sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

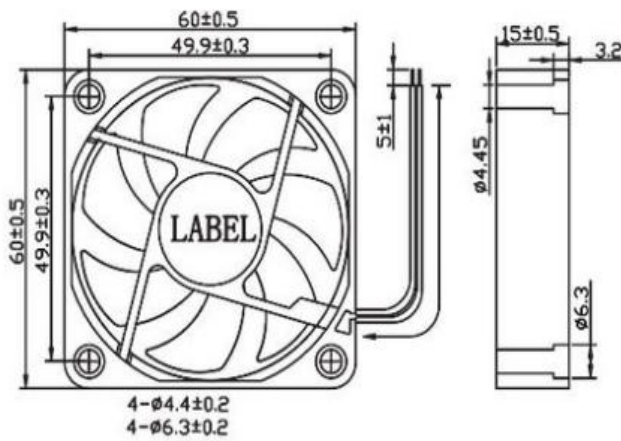

P@Q CURVE(AT RATED VOLTAGE)

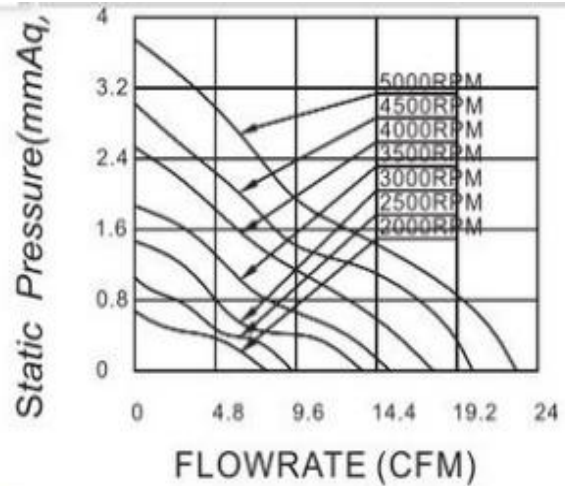

Model	Bearing Mode①	Rated Voltage	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AF7D6015B05L	B=Ball S=Sleeve H=Hydraulic	5	1.8~3~6	0.12	0.6	2000	0.225	7.95	0.67	0.026	19.2
AF7D6015B05LM		5	1.8~3~6	0.192	0.96	2500	0.265	9.35	1.08	0.043	22.9
AF7D6015B05M		5	1.8~3~6	0.24	1.2	3000	0.381	13.4	1.46	0.057	24.2
AF7D6015B05ML		5	1.8~3~6	0.29	1.44	3500	0.439	15.5	1.93	0.076	26.9
AF7D6015B05H		5	1.8~3~6	0.36	1.8	4000	0.498	17.5	2.49	0.098	30.8
AF7D6015B12L		12	7~13.5	0.05	0.6	2000	0.225	7.95	0.67	0.026	19.2

AF7D6015B12LM	B=Ball S=Sleeve H=Hydraulic	12	7~13.5	0.08	0.96	2500	0.265	9.35	1.08	0.043	22.9
AF7D6015B12M		12	7~13.5	0.10	1.2	3000	0.381	13.4	1.46	0.057	24.2
AF7D6015B12ML		12	7~13.5	0.12	1.44	3500	0.439	15.5	1.93	0.076	26.9
AF7D6015B12H		12	7~13.5	0.15	1.8	4000	0.498	17.5	2.49	0.098	30.8
AF7D6015B12HL		12	7~13.5	0.20	2.4	4500	0.570	20.1	3.07	0.121	34.4
AF7D6015B12HH		12	7~13.5	0.25	3	5000	0.636	22.4	3.72	0.146	35.2
AF7D6015B24L		24	18~26.5	0.025	0.6	2000	0.225	7.95	0.67	0.026	19.2
AF7D6015B24LM		24	18~26.5	0.04	0.96	2500	0.265	9.35	1.08	0.043	22.9
AF7D6015B24M		24	18~26.5	0.05	1.2	3000	0.381	13.4	1.46	0.057	24.2
AF7D6015B24ML		24	18~26.5	0.06	1.44	3500	0.439	15.5	1.93	0.076	26.9
AF7D6015B24H		24	18~26.5	0.075	1.8	4000	0.498	17.5	2.49	0.098	30.8
AF7D6015B24HL		24	18~26.5	0.10	2.4	4500	0.570	20.1	3.07	0.121	34.4
AF7D6015B24HH		24	18~26.5	0.125	3	5000	0.636	22.4	3.72	0.146	35.2


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL) Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引：编码规则Code Rule

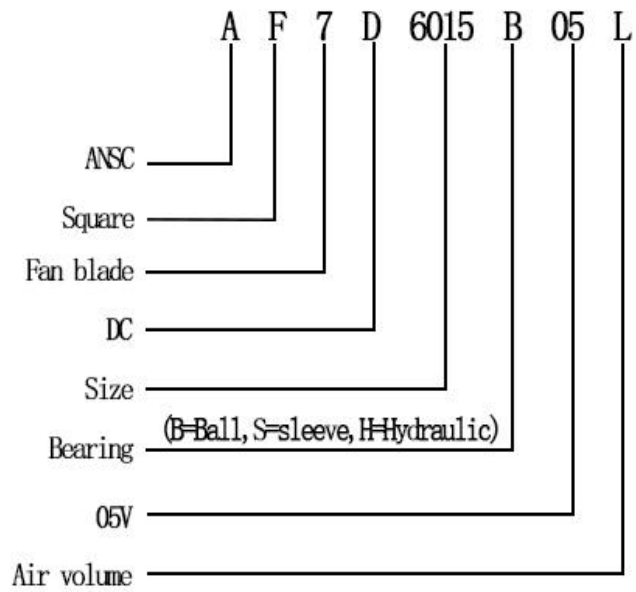

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>