



DC Centrifugal FAN



AQL19069B 190*69MM

Motor:DC Centrifugal
 Bearing:Two Ball
 Shell frame: Aluminum
 Fan blade: PBT UL94V_0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

P@Q CURVE(AT RATED VOLTAGE)

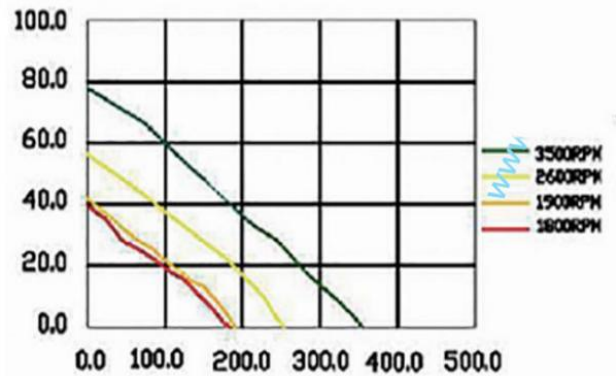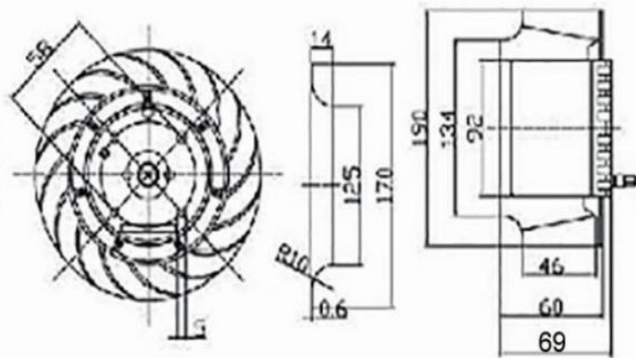

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AQL19069B24L	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	1.00	24.00	1900	316.70	186.5	41.50	407.20	42.8
AQL19069B24M		24	18~26.5	2.10	50.40	2600	433.30	255.2	56.80	557.20	58.6
AQL19069B24H		24	18~26.5	4.70	112.80	3500	583.40	343.6	76.50	750.00	78.9
AQL19069B48L		48	36~54	0.40	19.20	1800	300.00	176.7	39.00	385.70	40.6
AQL19069B48M		48	36~54	1.00	48.00	2600	433.30	255.2	56.80	557.20	58.6
AQL19069B48H		48	36~54	2.50	120.00	3500	583.40	343.6	76.50	760.20	78.9


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引： 编码规则 Code Rule

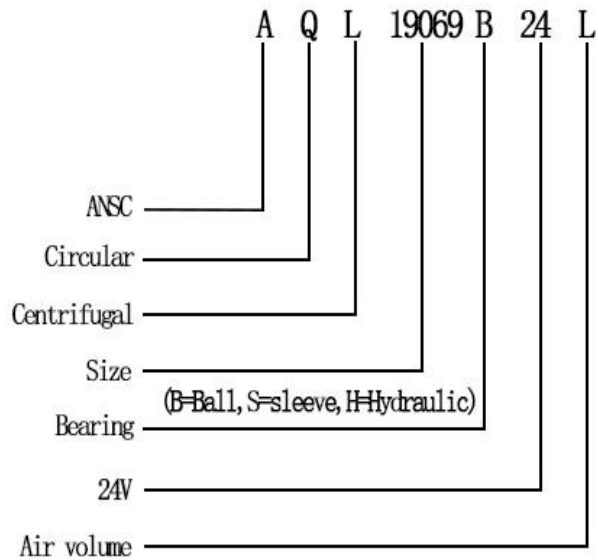

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>