



EC Centrifugal FAN



AQL505315B 505*315mm

Motor: EC Centrifugal
 Bearing: Ball
 Shell frame: Aluminum alloy
 Fan blade: Aluminum alloy
 Insulation: Class B
 Wire: AWG#26UL1007 (optional)
 PIN1: BLACK WIRE---(-)
 PIN2: RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

P@Q CURVE(AT RATED VOLTAGE)

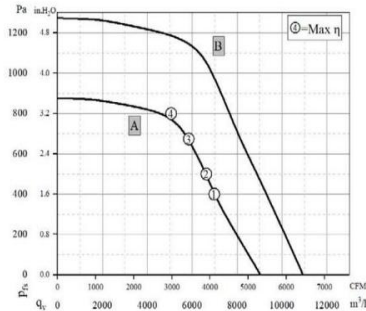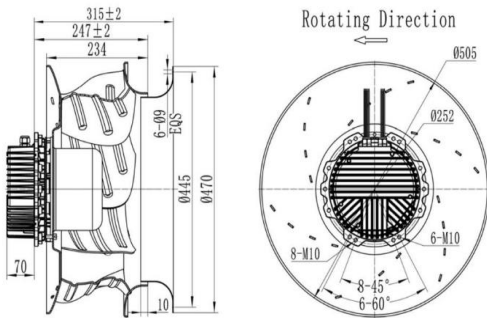

	P _s (Pa)	Airflow (m ³ /h)	Speed (rpm)	Power (W)	Noise (dB(A))
A	① 400	6890	1690	2308	78.1
	② 500	6630	1700	2283	77.2
	③ 674	5845	1705	2412	76.3
	④ 800	5060	1705	2448	76.5

● 距离风机出口 1m 处测试噪音/Test noise from fan outlet 1 m away

Model	Bearing Mode①	Rated Vol	Frequency	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH20	InH20	
PART. NO.		VDC	VAC	HZ	Watt	R. P. M					dB-A
AQL505315B10L	B=Ball S=Sleeve H=Hydraulic	10	3~380	50/60	2040	1700	9014	/	/	/	83.9
AQL505315B10M		10	3~380	50/60	3660	2050	10930	/	/	/	87.9


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引：编码规则Code Rule

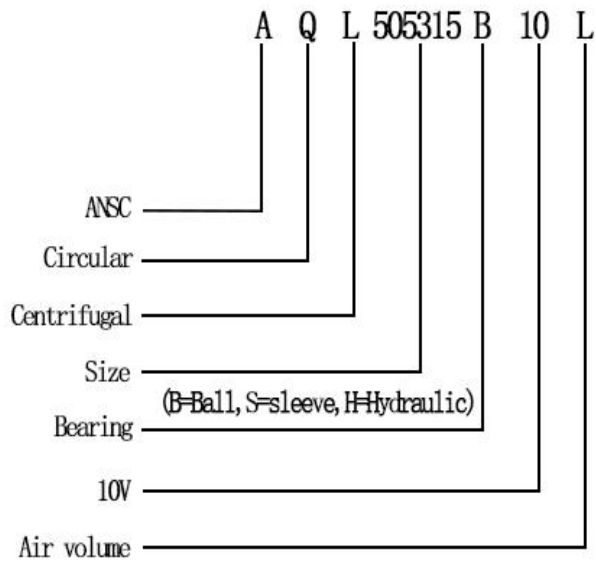

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>