




DC Centrifugal FAN

AQL12054B 120*54mm


Motor:DC Centrifugal
 Bearing:Two Ball
 Shell frame: PBT UL94V_0
 Fan blade: PBT UL94V_0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

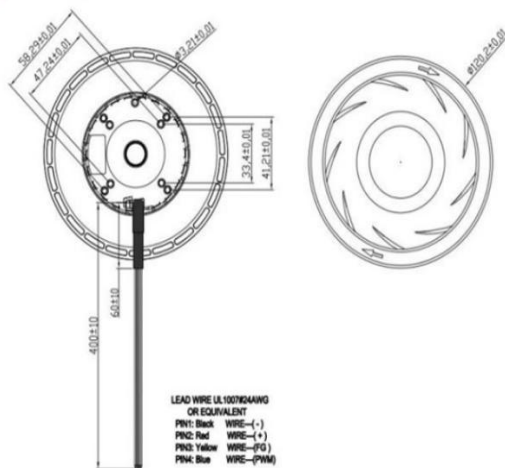

P@Q CURVE(AT RATED VOLTAGE)

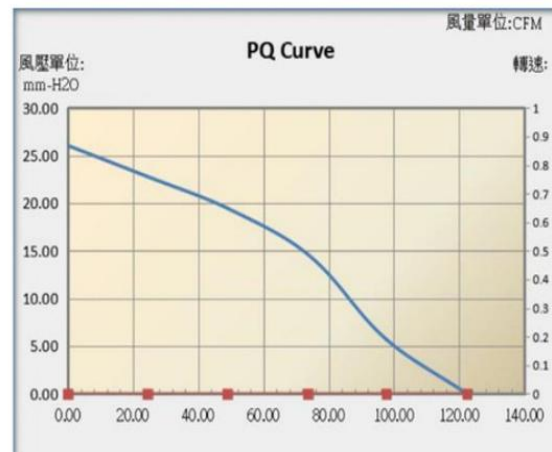

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	lnH2O	dB-A
AQL12054B24L	B=Ball S=Sleeve H=Hydraulic	24	12~26	0.85	20.40	4000	3.462	122.36	26.05	1.025	62.3
AQL12054B24M		24	12~26	2.13	51.00	5200	5.320	188.00	44.52	1.753	66.5
AQL12054B24H		24	12~26	3.20	76.80	6100	6.282	222.00	73.96	2.912	69.2
AQL12054B48L		48	36~50	0.43	20.40	4000	3.462	122.36	26.05	1.025	62.3
AQL12054B48M		48	36~50	1.06	51.00	5200	5.320	188.00	44.52	1.753	66.5
AQL12054B48H		48	36~50	1.60	76.80	6100	6.282	222.00	73.96	2.912	69.2


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve(UL)Hydraulic(UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引： 编码规则Code Rule

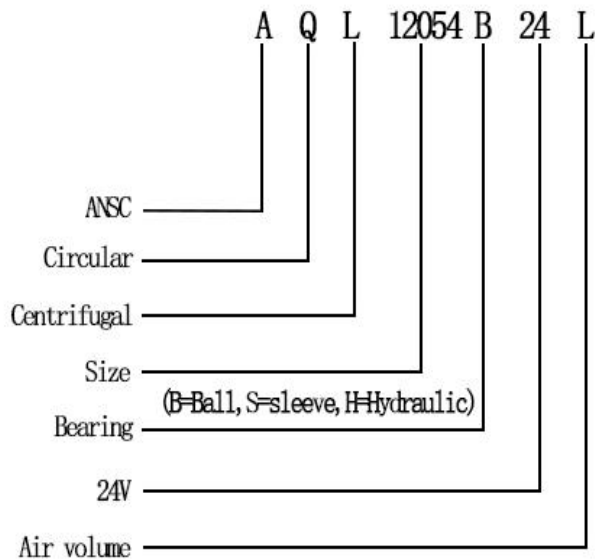

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>