



EC Centrifugal FAN




AQL465233B 465*233MM

Motor:EC Centrifugal
 Bearing:Ball
 Shell frame: Aluminum alloy
 Fan blade: Aluminum alloy
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

P@Q CURVE(AT RATED VOLTAGE)

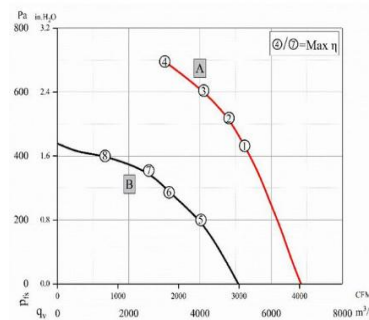

		P _{st} (Pa)	Airflow (m ³ /h)	Speed (rpm)	Power (W)	Noise (dB(A))
A	①	430	5255	1610	1206	/
	②	520	4815	1610	1237	/
	③	605	4105	1610	1220	/
	④	695	3015	1610	1091	/
B	⑤	200	4025	1200	522	/
	⑥	285	3135	1160	505	/
	⑦	355	2560	1205	521	/
	⑧	400	1335	1210	401	/

●距离风机出口 1m 处测试噪音/Test noise from fan outlet 1 m away

Model	Bearing Mode①	Rated Vol	Frequency	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH20	InH20	
PART. NO.		VDC	VAC	HZ	Watt	R. P. M					dB-A
AQL465233B380M	B=Ball S=Sleeve H=Hydraulic	380	3~380	50/60	386	1200	5075	/	/	/	/
AQL465233B380H		380	3~380	50/60	900	1610	6840	/	/	/	/


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement,Service life, Temperature, Noise, Material, Mold.etc.

导引：编码规则Code Rule

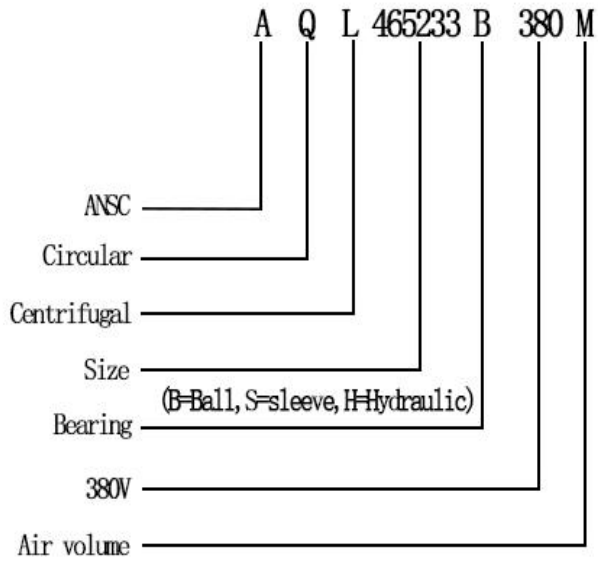

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>