





JN Semiconductor®

To kara more about Old Semiconductor, please visit our website at

Please note. As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



FFA60UA60DN Ultrafast II Dual Diode

Features

- Ultrafast Recovery, T_{rr} = 90ns (@ I_F = 30 A)
- Max Forward Voltage, V_F < 2.2 V
- · High Reverse Voltage and High Reliability
- · Avalanche Energy Rated
- · RoHS Compliant

Applications

- · Boost Diode in PFC and SMPS
- · Welder, UPS and Motor Control Application

Description

The FFA60UA60DN is an ultrafast II dual diode with low forward voltage drop and rugged UIS capability. This device is intended for use as freewheeling and clamping diodes in a variety of switching power supplies and other power switching applications. It is specially suited for use in the ingression of the power supplies and industrial applicationa as welder and UP, oplication.

Pin Assignments



1. Ar de 2. Cathode 3. Anode



1. Anode 2. Cathode 3. Anode

Absolut N. n katings Per leg at (C): 25°C un'ess otherwise noted

| S | Parameter Parameter | Ratings | Unit |
|-----------------------------------|--|-------------|------|
| M | k Repetitive Reverse Volta je | 600 | V |
| V _R . | Working Peak Reverse Voltage | 600 | V |
| V _R | DC Slocking Voltage | 600 | V |
| I _{F(AV)} | Average Rectined Forward Current @ T _C = 95°C | 30 | Α |
| I _{FSM} | Non-repetitive Peak Surge Current 60Hz Single Half-Sir e Wave | 180 | А |
| T ₁ , T _{STG} | Operating and Storage Temperature Range | -65 to +175 | °C |

Thermal Characteristics Per leg at T_C = 25°C unless otherwise noted

| Symbol | Parameter | Ratings | Unit |
|-----------------|--|---------|------|
| $R_{\theta JC}$ | Maximum Thermal Resistance, Junction to Case | 1.3 | °C/W |

Package Marking and Ordering Information

| Part Number | Top Mark | Package | Packing Method | Reel Size | Tape Width | Quantity |
|-------------|-----------|---------|----------------|-----------|------------|----------|
| FFA60UA60DN | F60UA60DN | TO-3P | Tube | N/A | N/A | 30 |

Electrical Characteristics Per leg at $T_C = 25^{\circ}C$ unless otherwise noted

| Symbol | Parameter | Min. | Тур. | Max. | Unit | |
|-------------------|---|---|------|------|------|----|
| V 1 | I _F = 30 A | $T_{\rm C} = 25^{\rm o}{\rm C}$ $T_{\rm C} = 125^{\rm o}{\rm C}$ | - | - | 2.2 | V |
| V _{FM} 1 | I _F = 30 A | $T_{\rm C} = 125^{\rm o}{\rm C}$ | - | - | 2.0 | V |
| | V _R = 600 V | $T_{\rm C} = 25^{\rm o}{\rm C}$ $T_{\rm C} = 125^{\rm o}{\rm C}$ | - | - | 100 | |
| I _{RM} 1 | V _R = 600 V | $T_{\rm C} = 125^{\rm o}{\rm C}$ | - | - | 150 | μΑ |
| t _{rr} | | | - | - | 90 | ns |
| I _{rr} | $I_F = 30 \text{ A}, di_F/dt = 200 \text{ A}/\mu\text{s}$ | $T_{\rm C} = 25^{\rm o}{\rm C}$ | - | - | 8 | Α |
| Q _{rr} | | | - | - | 360 | nC |
| W_{AVL} | Avalanche Energy (L = 40 mH) | | 20 | - | - | mJ |

Notes:
1: Pulse: Test Pulse width = 300μs, Duty Cycle = 2%

Test Circuit and Waveforms

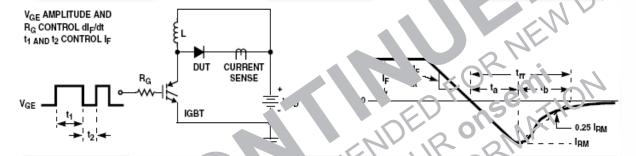


Figure 1 Jiode ev se Recovery Test Circuit



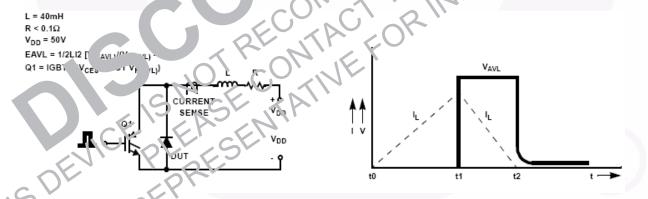



Figure 2. Unclamped Inductive Switching Test Circuit & Waveform

Typical Performance Characteristics

Figure 3. Typical Forward Voltage Drop vs. Forward Current

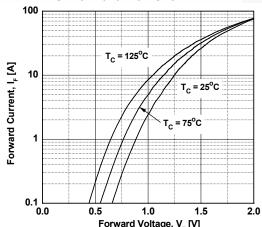

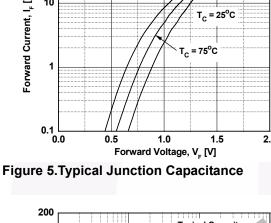

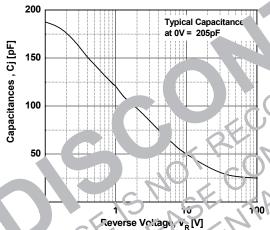

Figu. a 7. Typical Reverse Recovery Current vs. di_F/dt

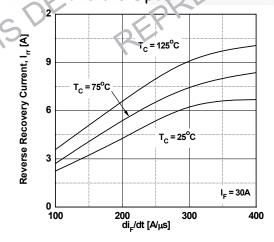


Figure 4. Typical Reverse Current vs. **Reverse Voltage**

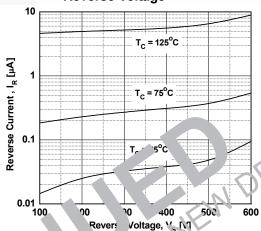


Fig nica. ..everse Recovery Time li_F/dt

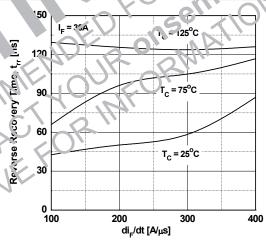
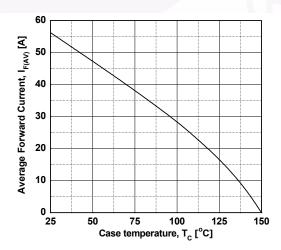


Figure 8. Forward Current Derating Curve



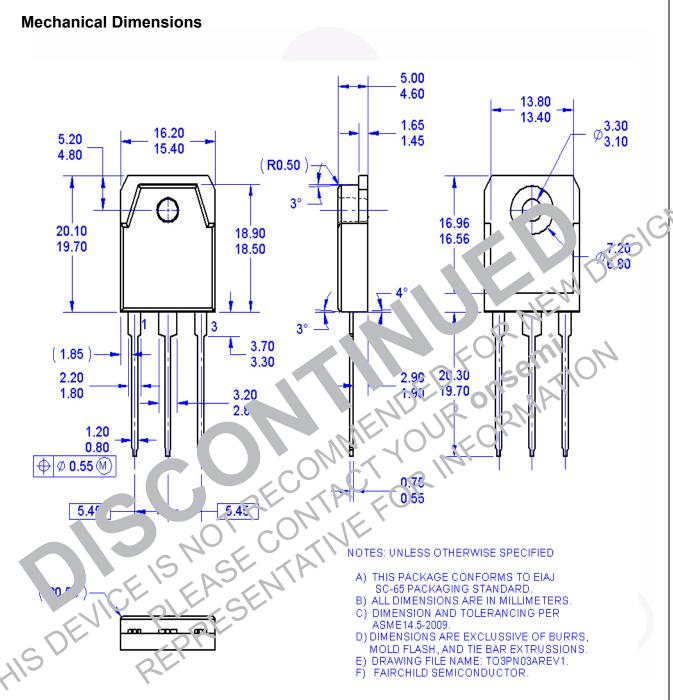


Figure 9. TO-3P 3L - 3LD, T03, PLASTIC, EIAJ SC-65

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN_TT3P0-003.



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

®

AccuPower™ F-PFS™ FRFET® Awinda[®] AX-CAP®* Global Power ResourceSM BitSiC™ GreenBridge™ Green FPS™ Build it Now™ Green FPS™ e-Series™ CorePLUS™ CorePOWER™ Gmax™ GTO™ CROSSVOLT™ CTL™ IntelliMAX™ ISOPLANAR™ Current Transfer Logic™ DEUXPEED® Marking Small Speakers Sound Louder

Dual Cool™ and Better™ MegaBuck™ EcoSPARK® EfficentMax™ MICROCOUPLER™ ESBC™ MicroFET™

MicroPak™ MicroPak2™ MillerDrive™ Fairchild® MotionMax™ Fairchild Semiconductor® MotionGrid[®] FACT Quiet Series™ FACT® MTi[®] MTx® FAST® MVN® FastvCore[™] mWSaver® FETBench™ FPS™

PowerTrench® PowerXS™ Programmable Active Droop™ QFET® QS™ Quiet Series™ RapidConfigure™ Saving our world, 1mW/W/kW at a time™

SmartMax™ SMART START™ Solutions for Your Success™ SPM[®] STEALTH™

SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 Suprel/ SymFE 1.0Ch

SignalWise™

SYSTEM ®* TinyBoost[®] TinyBuck[®] TinyCalc™ TinyLogic[®] TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC™ JECUK ~Des™ /L Sè

UHC a FRFE™ vniFET™ **VCX**TI V stral'Max™ Vo₁⁺agePlus™ XSTM Xsens™

*Trademarks of System General Corporation, used under licens y Fairch. Semicor

OptoHiT™

DISCLAIMER

NGES WITHOU' I'CRIHER NOTICE TO ANY FRODUCT HEREIN TO IMPROVE THE AIL. OST UP 10 DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR CHI. DOES NOT ACSUME ANY LIVBILITY ARISING OUT OF THE APPLICATION OR USE OF HER DESIT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF HE TERMS OF PURCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT RELIABILITY, FUNCTION, OR DESIGN. TO OP THL ATL WEBSITE AT HTTP://WWW.FAIRCHILDSEMI. ANY PRODUCT OR CIRCUIT DESCRIBED I REIN: NE OTHERS. THESE SPECIFICATIONS DO NO FXPAND WARRANTY THEREIN, WHICH CO PROD' ... THE /TS.

LIFE SUPPORT POLICY

AUTH RIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE SHILD SEMICONDUCTURE CORPORATION.

As used here in

- Life support vices or sys inside devices or systems which, (a) are it into the rod, or (b) support or sustain life for s icai and (c) where the eto perform when properly use in accordance with struction for the provided in the labeling, can be reasonably acted the esult in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-CC (ERFFICING FOLICY

Fairchild Semiconductor Corporcion's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildcemi.com, under Sales Support.

Counter : aiting or semiconductor parts is a crowing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their paris. Cus omers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed ည်ကျင် tion, and increased cost or production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fall child strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|-------------------|---|
| | | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only. |

Rev. 171



ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and severally, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify an

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative