

DC/DC Converter

B_XT-1WR2 Series

MORNSUN®

1W Isolated DC-DC converter

Fixed input voltage, unregulated single output



CE Report CB RoHS Patent Protection
EN 60950-1 IEC 62368-1
EN 62368-1

FEATURES

- Continuous short-circuit protection
- Operating ambient temperature range: -40°C to +105°C
- Compact SMD package
- I/O isolation test voltage 1.5k VDC
- Internal surface mounted design
- No extra components required
- Industry standard pin-out

B_XT-1WR2 series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF) Max.
		Nominal (Range)	Voltage (VDC)	Current(mA) Max./Min.		
EN	B0303XT-1WR2	3.3 (2.97-3.63)	3.3	303/30	65/69	220
	B0305XT-1WR2		5	200/20	70/74	
--	B0309XT-1WR2		9	111/12	76/80	
	B0312XT-1WR2		12	84/9	76/80	
	B0315XT-1WR2		15	67/7	76/80	
	B0324XT-1WR2	5 (4.5-5.5)	24	42/4	76/80	
	B0503XT-1WR2		3.3	303/30	68/72	
	B0505XT-1WR2		5	200/20	76/80	
	B0506XT-1WR2		6	167/17	76/80	
	B0509XT-1WR2		9	111/12	76/80	
	B0512XT-1WR2		12	84/9	76/80	
EN	B0515XT-1WR2		15	67/7	76/80	
	B0524XT-1WR2		24	42/4	76/80	
	B1203XT-1WR2	12 (10.8-13.2)	3.3	303/30	68/72	
	B1205XT-1WR2		5	200/20	72/76	
	B1209XT-1WR2		9	111/12	76/80	
	B1212XT-1WR2		12	84/9	76/80	
	B1215XT-1WR2		15	67/7	76/80	
	B1224XT-1WR2		24	42/4	76/80	
	B1505XT-1WR2		5	200/20	76/80	
--	B1509XT-1WR2	15 (13.5-16.5)	9	111/12	76/80	
EN	B1515XT-1WR2		15	67/7	76/80	
--	B2403XT-1WR2	24 (21.6-26.4)	3.3	303/30	67/71	
EN	B2405XT-1WR2		5	200/20	76/80	
EN/IEC	B2409XT-1WR2		9	111/12	76/80	
	B2412XT-1WR2		12	84/9	76/80	
EN	B2415XT-1WR2		15	67/7	76/80	
	B2424XT-1WR2		24	42/4	76/80	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.11-B/3

Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	3.3V input	--	404/25	--/70	mA
	5V input	--	250/20	--/60	
	12V input	--	104/15	--/50	
	15V input	--	82/10	--/35	
	24V input	--	52/7	--/30	
Reflected Ripple Current		--	15	--	mA
Surge Voltage (1sec. max.)	3.3V input	-0.7	--	5	VDC
	5V input	-0.7	--	9	
	12V input	-0.7	--	18	
	15V input	-0.7	--	21	
	24V input	-0.7	--	30	
Input Filter		Capacitance filters			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			See output regulation curve (Fig. 1)			
Linear Regulation	Input voltage change: $\pm 1\%$	3.3VDC output	--	--	± 1.5	--
		Others	--	--	± 1.2	
Load Regulation	10%-100% load	3.3VDC output	--	18	--	%
		5VDC output	--	12	--	
		6VDC output	--	10	--	
		9VDC output	--	8	--	
		12VDC output	--	7	--	
		15VDC output	--	6	--	
		24VDC output	--	5	--	
Ripple & Noise*	20MHz bandwidth		--	60	150	mVp-p
Temperature Coefficient	Full load		--	--	± 0.03	%/ $^{\circ}\text{C}$
Short-circuit Protection**	B03xxXT-1WR2/B24xxXT-1WR2/ B0524XT-1WR2		--	--	1	s
	Others		Continuous, self-recovery			

Notes: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information;

** Supply voltage must be discontinued at the end of short-circuit duration for B03xxXT-1WR2 series, B24xxXT-1WR2 series, and B0524XT-1WR2 model.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	M Ω
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	20	--	pF
Operating Temperature	Derating when operating temperature $\geq 100^{\circ}\text{C}$ (see Fig. 2)	-40	--	105	$^{\circ}\text{C}$
Storage Temperature		-55	--	125	
Case Temperature Rise	Ta=25 $^{\circ}\text{C}$, nominal input, full load output	--	25	--	
Storage Humidity	Non-condensing	--	--	95	%RH
Reflow Soldering Temperature		Peak temp. $\leq 245^{\circ}\text{C}$, maximum duration time $\leq 60\text{s}$ over 217 $^{\circ}\text{C}$. For actual application, please refer to IPC/JEDEC J-STD-020D.1.			
Switching Frequency	Full load, nominal input voltage	--	100	--	kHz
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$	3500	--	--	k hours

Mechanical Specifications

Case Material	Black epoxy resin; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	12.70 x 11.20 x 7.25 mm
Weight	1.6g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 4 for recommended circuit)
	RE	CISPR32/EN55032	CLASS B (see Fig. 4 for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Contact ±8kV perf. Criteria B

Typical Characteristic Curves

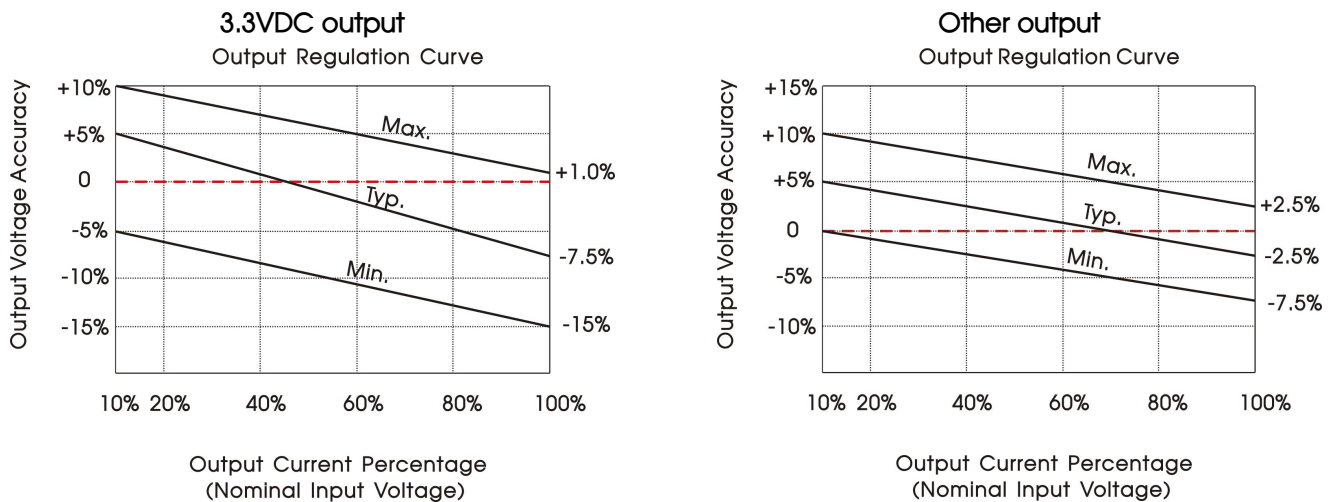


Fig. 1





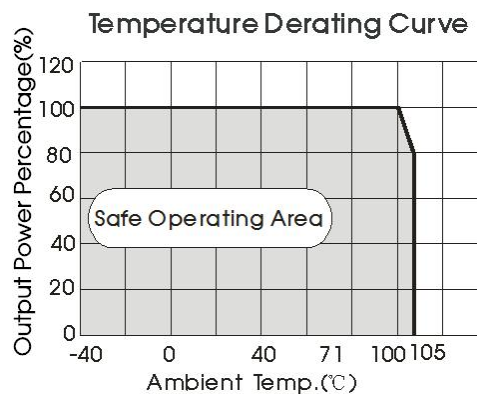


Fig. 2

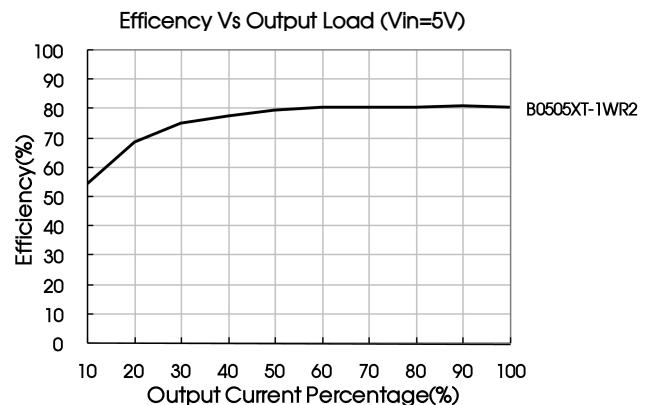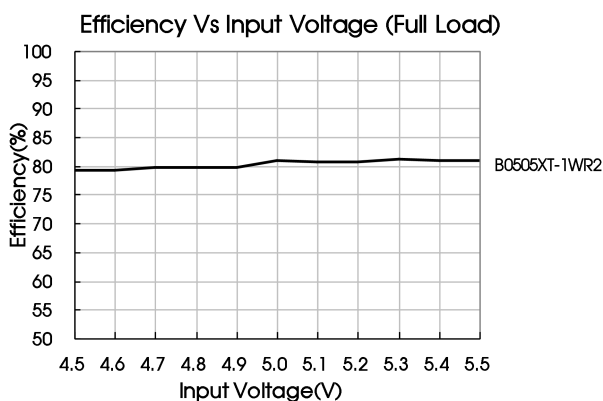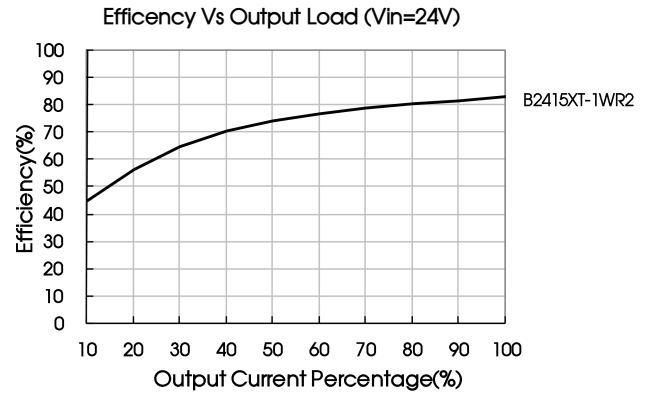

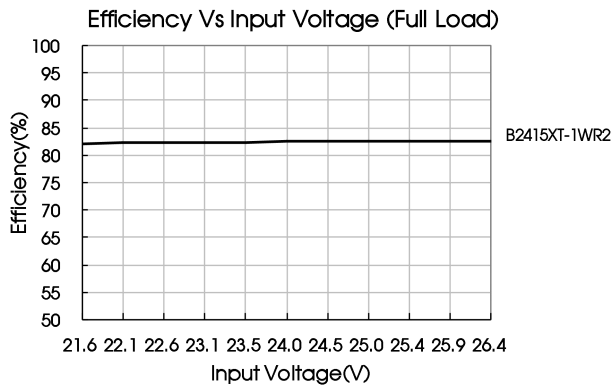

Design Reference

1. Typical application circuit

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

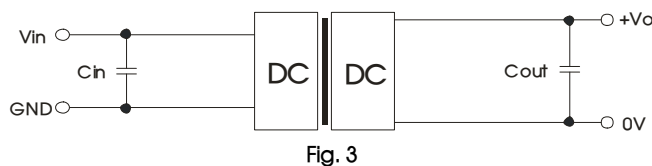


Fig. 3

Table 1: Recommended capacitive load value table

Vin	Cin	Vo	Cout
3.3VDC	4.7μF/16V	3.3VDC	10μF/16V
5VDC	4.7μF/16V	5/6VDC	10μF/16V
12VDC	2.2μF/25V	9VDC	4.7μF/16V
15VDC	2.2μF/50V	12VDC	2.2μF/25V
24VDC	1μF/50V	15VDC	1μF/25V
--	--	24VDC	0.47μF/50V

2. EMC (CLASS B) compliance circuit

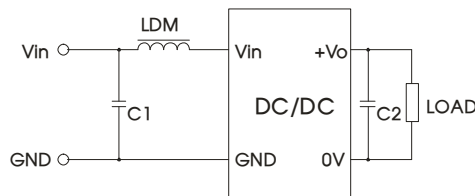


Fig. 4

Input voltage		3.3/5/12/15/24VDC
Emissions	C1	4.7μF /50V
	C2	Refer to the Cout in Fig. 3
	LDM	6.8μH


3. Minimum output load requirement


In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 10% rated load when it is used. If the needed power is indeed small, please parallel a resistor on the output side (The sum of the efficient power and resistor consumption power is not less than 10%).

4. For additional information, please refer to DC-DC converter application notes on

www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

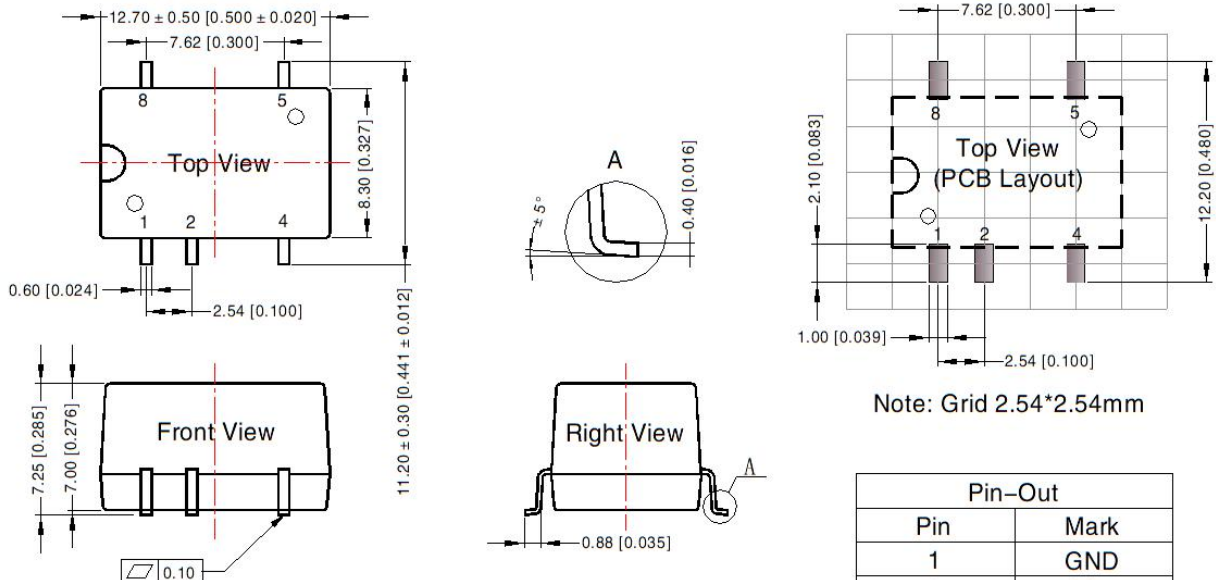

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 0.25 [\pm 0.010]$

Pin-Out	
Pin	Mark
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: Pin to be isolated from circuitry

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Tube Packaging bag number: 58210024, Roll Packaging bag number: 58200054;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com