



## TX2400-JW-3 Product Data Sheet


**2.45GHz Mini Rubber Antenna**  
**SMA Male Connector**

## I. Product Introduction

TX2400-JW-3 is a 2.45GHz mini straight rubber antenna. Height of the antenna is 29mm. With a SMA Male connector (SMA inner screw thread and inner needle), it can be applied to such broadband communication system, WLAN and mobile terminal equipment with frequency of 2.45GHz as router, AP, radio station, WiFi, smart TV and so on.

## II. Specification and Parameters


Physical Parameters	
Frequency	2.45GHz
Bandwidth	2.4-2.5GHz
Gain	2.5dBi
SWR	≤1.5
Polarization	Vertical
Radiation Direction	Omnidirectional
Input Impedance	50 Ω
Power Capacity	20W
Other Parameters	
Height	29mm
Total Weight	2g
Coat Material	TPEE
Connector	SMA Male (SMA inner screw thread and inner needle)
Working Temperature	-40℃~+85℃
Storage Temperature	-40℃~+85℃

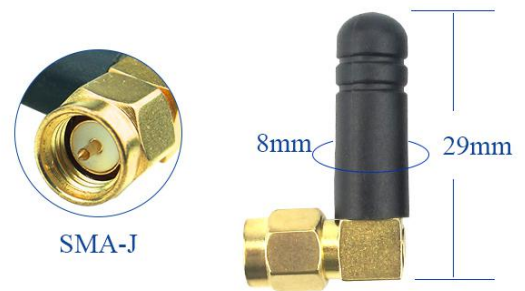




### III. Testing

▶ S22 SWR 1.000/ Ref 1.000

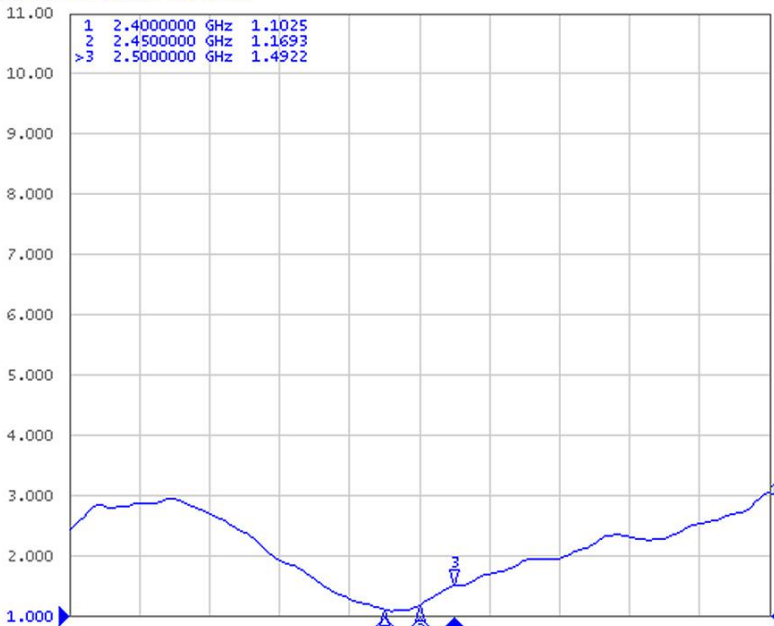

▶ S22 Smith (R+jX) Scale 1.000U

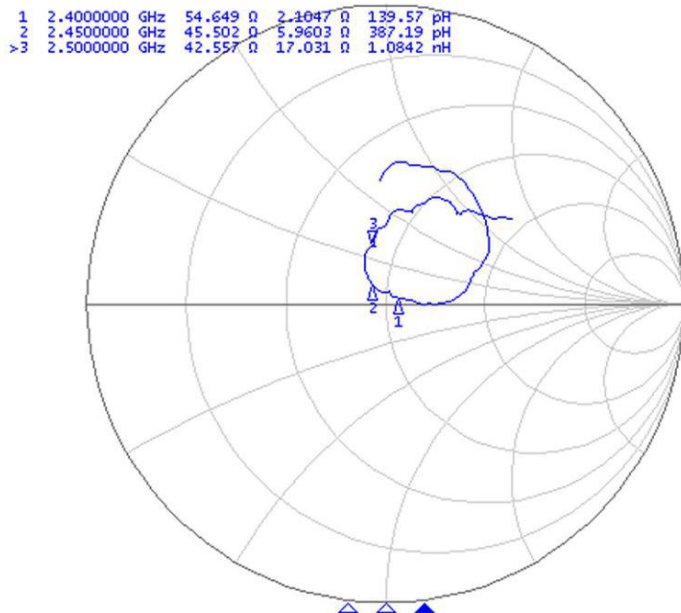



## IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

## About us

Technical support: [support@cdebyte.com](mailto:support@cdebyte.com)

Documents and RF Setting download link: [www.ebyte.com](http://www.ebyte.com)

Thank you for using Ebyte products! Please contact us with any questions or suggestions: [info@cdebyte.com](mailto:info@cdebyte.com)

-----  
Fax: 028-64146160 ext. 821

Web: [www.ebyte.com](http://www.ebyte.com)

Address: Innovation Center D347, 4# XI-XIN Road, Chengdu, Sichuan, China

 **Chengdu Ebyte Electronic Technology Co.,Ltd.**