



DC Blower fan

AG4015B 40*40*15mm

Motor:DC

Bearing:Ball、sleeve、Hydraulic

Shell frame: PBT UL94V-0

Fan blade: PBT UL94V-0

Insulation:Class B


Wire:AWG#26UL1007 (optional)

PIN1:BLACK WIRE----(-)


PIN2:RED WIRE----(+)



DIMENSIONS DRAWING(unit:mm)

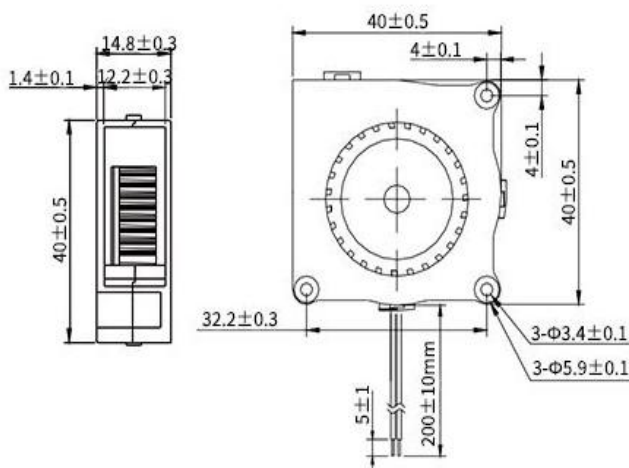

P@Q CURVE(AT RATED VOLTAGE)

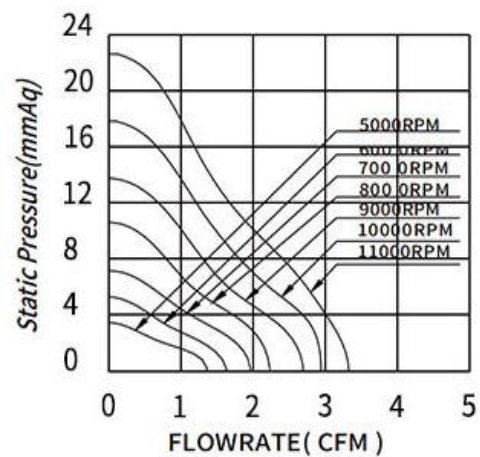

Model	Bearing Mode①	Rated	Operating	Rated	Rated	Speed	Maximum		Maximum		Noise
		Volt	voltage range	current	input power		air Flow	Air pressure	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AG4015B05LL	B=Ball S=Sleeve H=Hydraulic	5	1.8~3.6~6.8	0.072	0.36	5000	0.039	1.37	3.42	0.135	29.0
AG4015B05L		5	1.8~3.6~6.8	0.096	0.48	6000	0.046	1.64	5.25	0.207	33.5
AG4015B05M		5	1.8~3.6~6.8	0.12	0.60	7000	0.056	1.97	7.15	0.281	37.6
AG4015B05H		5	1.8~3.6~6.8	0.168	0.84	8000	0.068	2.39	10.58	0.417	41.2
AG4015B05HH		5	1.8~3.6~6.8	0.216	1.08	9000	0.076	2.70	13.70	0.539	44.7
AG4015B05VH		5	1.8~3.6~6.8	0.312	1.56	10000	0.083	2.95	17.70	0.697	47.0

AG4015B05HV	B=Ball S=Sleeve H=Hydraulic	5	1.8~3.6~6.8	0.35	1.80	11000	0.094	3.33	22.57	0.888	49.4
AG4015B12LL		12	7~13.5	0.03	0.36	5000	0.039	1.37	3.42	0.135	29.0
AG4015B12L		12	7~13.5	0.04	0.48	6000	0.046	1.64	5.25	0.207	33.5
AG4015B12M		12	7~13.5	0.05	0.60	7000	0.056	1.97	7.15	0.281	37.6
AG4015B12H		12	7~13.5	0.07	0.84	8000	0.068	2.39	10.58	0.417	41.2
AG4015B12HH		12	7~13.5	0.09	1.08	9000	0.076	2.70	13.70	0.539	44.7
AG4015B12VH		12	7~13.5	0.13	1.56	10000	0.083	2.95	17.70	0.697	47.0
AG4015B12HV		12	7~13.5	0.15	1.80	11000	0.094	3.33	22.57	0.888	49.4


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则Code Rule

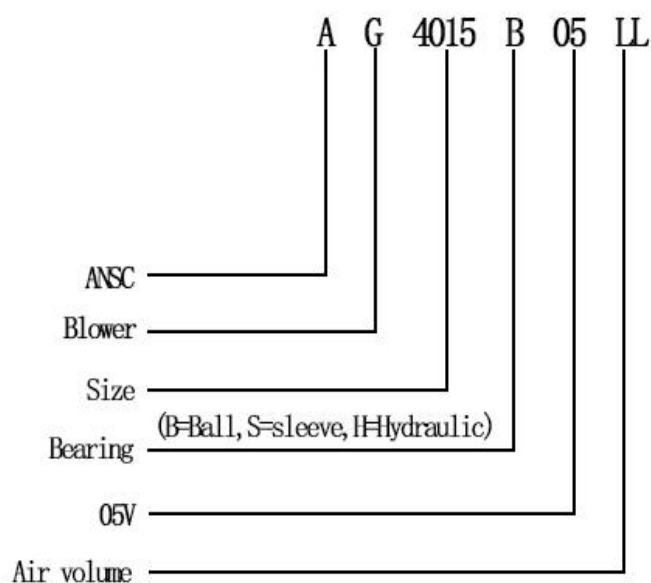

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
<ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>