



EC Centrifugal FAN



AQL17597B 175*175*97MM

Motor:EC Centrifugal
 Bearing:Two Ball
 Shell frame: PBT UL94V_0
 Fan blade: PBT UL94V_0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

P@Q CURVE(AT RATED VOLTAGE)

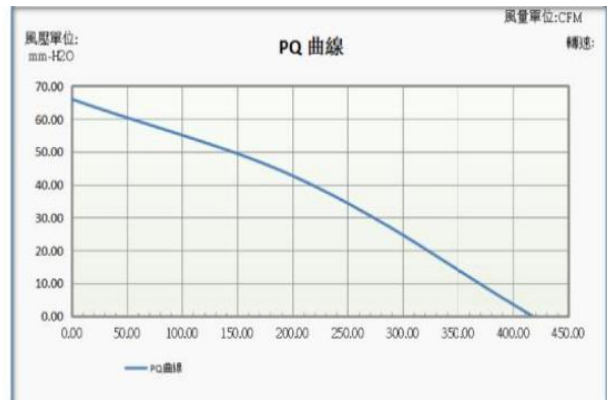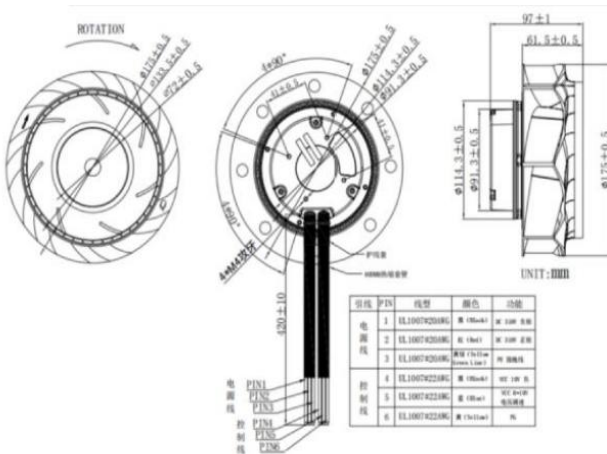

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VAC	HZ	Amp	Watt		R. P. M	M3/min	CFM	mmH20	
PART. NO.											
AQL17597B110H	B=Ball S=Sleeve H=Hydraulic	110	50/60	0.64	41.00	3000	9.271	327.60	38.95	1.535	61.2
AQL17597B110HH		110	50/60	1.17	75.00	4200	11.815	417.48	66.01	2.601	74.8
AQL17597B220H		220	50/60	0.32	41.00	3000	9.271	327.60	38.95	1.535	61.2
AQL17597B220HH		220	50/60	0.59	75.00	4200	11.815	417.48	66.01	2.601	74.8
AQL17597B310HH		310	50/60	0.34	105.00	4200	11.815	417.48	66.01	2.601	74.8


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL) /Sleeve (UL) Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引： 编码规则Code Rule

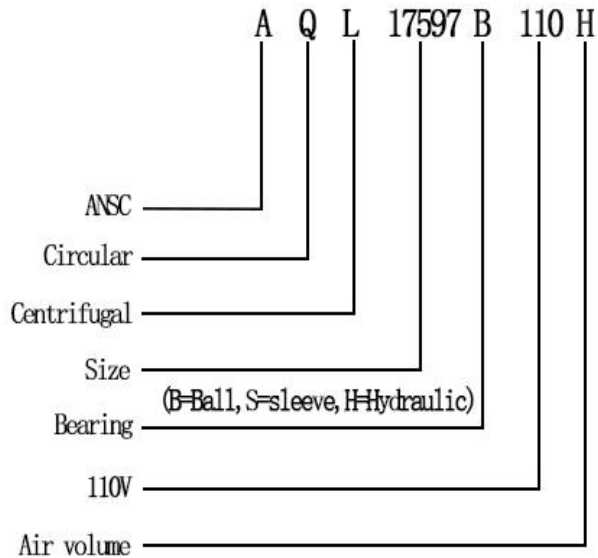

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>

<https://allnewsemi.shop>