




## DC BLOWER FAN

AG12032B 120\*120\*32mm


Motor:DC Blower  
 Bearing:Ball、Sleeve、Hydraulic  
 Shell frame: PBT UL94V\_0  
 Fan blade: PBT UL94V\_0  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE---(-)  
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

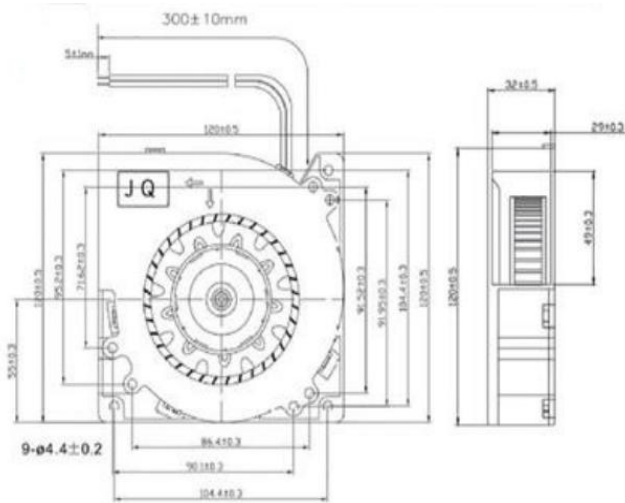

P@Q CURVE(AT RATED VOLTAGE)

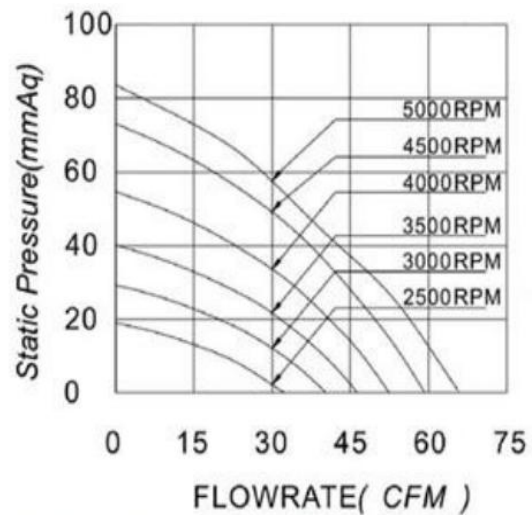

Model	Bearing Mode①	Rated Voltage	Operating voltage range	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	m <sup>3</sup> /min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	m <sup>3</sup> /min	CFM	mmH2O	InH2O	dB-A
AG12032B12L	B=Ball S=Sleeve H=Hydraulic	12	7.5~13.5	0.8	9.6	2500	1.143	32.35	18.98	0.747	50.4
AG12032B12M		12	7.5~13.5	1.4	16.8	3000	1.426	40.35	29.28	1.153	52.3
AG12032B12H		12	7.5~13.5	1.8	21.6	3500	1.639	46.38	40.17	1.581	58.3
AG12032B12HH		12	7.5~13.5	2.4	28.8	4000	1.853	52.44	54.63	2.151	59
AG12032B12VH		12	7.5~13.5	3.0	36	4500	2.096	59.32	73.11	2.878	62.2
AG12032B12HV		12	7.5~13.5	3.6	43.2	5000	2.331	65.96	83.60	3.291	64.7

AG12032B24L	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	0.4	9.6	2500	1.143	32.35	18.98	0.747	50.4
AG12032B24M		24	18~26.5	0.7	16.8	3000	1.426	40.35	29.28	1.153	52.3
AG12032B24H		24	18~26.5	0.9	21.6	3500	1.639	46.38	40.17	1.581	58.3
AG12032B24HH		24	18~26.5	1.2	28.8	4000	1.853	52.44	54.63	2.151	59
AG12032B24VH		24	18~26.5	1.5	36	4500	2.096	59.32	73.11	2.878	62.2
AG12032B24HV		24	18~26.5	1.8	43.2	5000	2.331	65.96	83.60	3.291	64.7
AG12032B48L		48	36~54	0.2	9.6	2500	1.143	32.35	18.98	0.747	50.4


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引：编码规则Code Rule

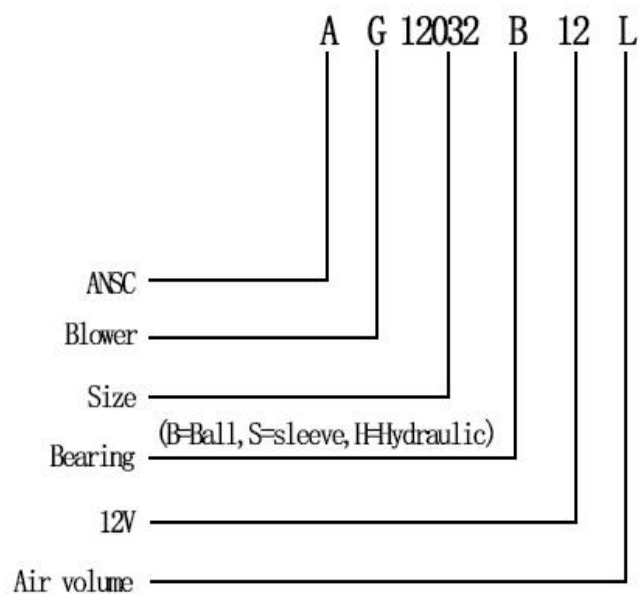

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>